


# OEVP 50 M 50000 G3LK-IBS/H

## High Performance Photoelectric Sensor, Receiver


- With heating element
- Very high contamination and functional reserve
- Robust metal casing
- Bright alignment aid via LED in receiver optics

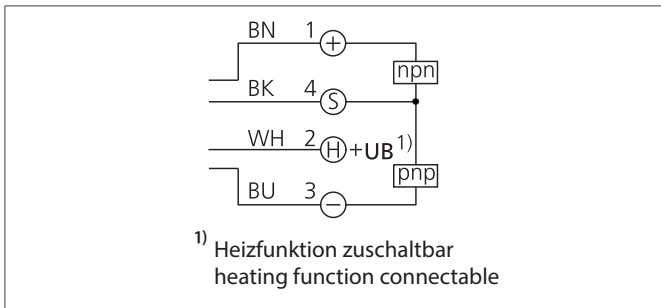

### Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

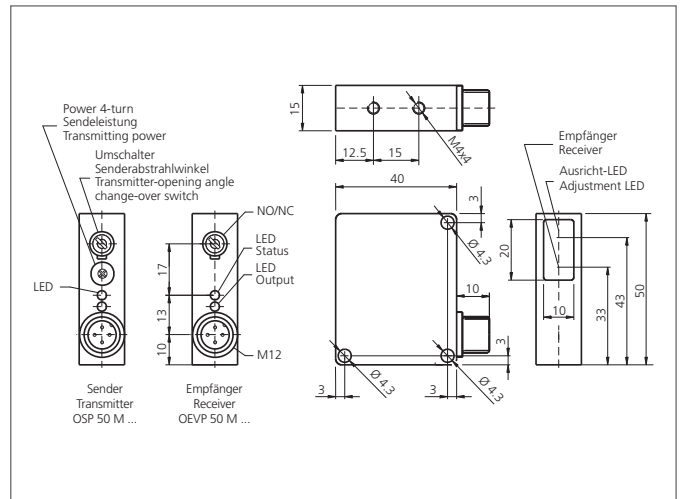

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Operating principle		Through beam sensors, receiver, switching output
Evaluation		digital
Size		50 x 40 x 15 mm (Dimensions)
Design		cuboid design
Characteristics		High transmit power and dirt penetration
Service voltage		10 ... 35 V DC
Internal power consumption		< 40 mA
Operating distance		0 ... 50.000 mm dependent on the transmitter
Sensitivity adjustment		no setting elements
Switching output		Push pull, 200 mA, NO/NC, switchable
Switching hysteresis		< 12 %
Power consumption		20 W heat up mode, 7 W with heating
Switching frequency		20 Hz
Ambient temperature		-40 ... +50 °C
Ambient light immunity		15 kLx, Sunlight, 2 kLx, g
Protection class		IP 67
Protection degree		III, operation on protective low voltage
Casing material		Die-cast zinc black lacquered finish
Connection		Connector, M12