


KSSTI 600/80 FG3LK-AIBS

Capacitive Label Sensor




- Detection of all, also metallized label materials
- Large slot depth for wide labels
- Sensitivity adjustment via teach key
- Auto-teach during a running process
- Remote teach option with key-lock function
- Temperature and air humidity compensation
- Static functional principle
- Separated housing

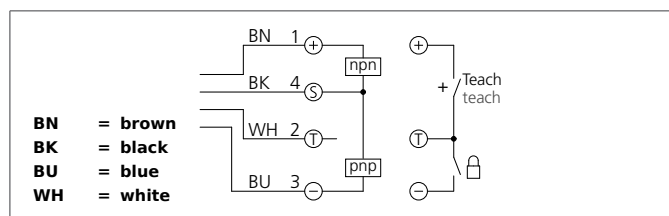

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

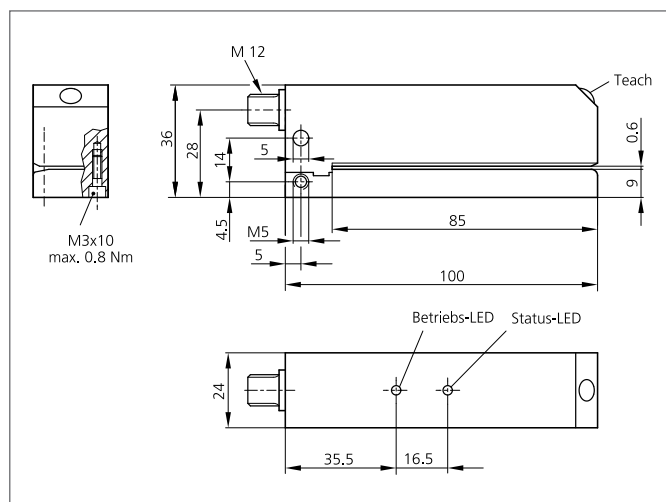

TECHNICAL INFORMATION (typ.)	
Operating principle	+20°C, 24V DC
Branch length	Capacitive
Slot width	85 mm
Service voltage	0,6 mm
Internal power consumption	10 ... 35 V DC
Sensitivity adjustment	< 70 mA
Switching output	Teach key + remote teach
Switching hysteresis	Push pull, 200 mA, NO/NC, switchable
Label length	material dependent
Label interspace	> 2 mm
Label thickness	> 2 mm
Voltage drop	< 0,5 mm
Ambient temperature	< 2,5 V
Insulation voltage endurance	0 ... +60 °C
Protection class	500 V
Casing material	IP 65
Connection	Aluminium black anodized
Connecting cable	Connector, M12, 4-poled
	VK ...