


LTV 51 M 600 P3K-IBS

Laser Diffuse Sensor




- Red light laser, with small laser spot
- 4-turn potentiometer
- Functional reserve indicator/contamination indicator
- Bright LED
- Light/dark switching

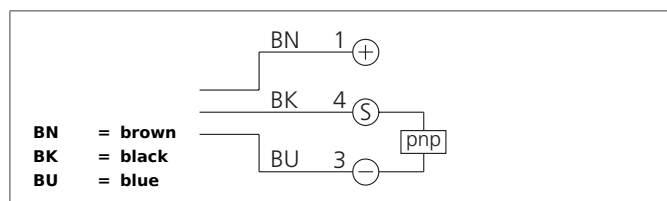

Safety instructions

Inproper use may result in hazardous radiation exposure. Pay attention to accident prevention rules and laser class. The instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments. These instruments shall exclusively be used by qualified personnel.

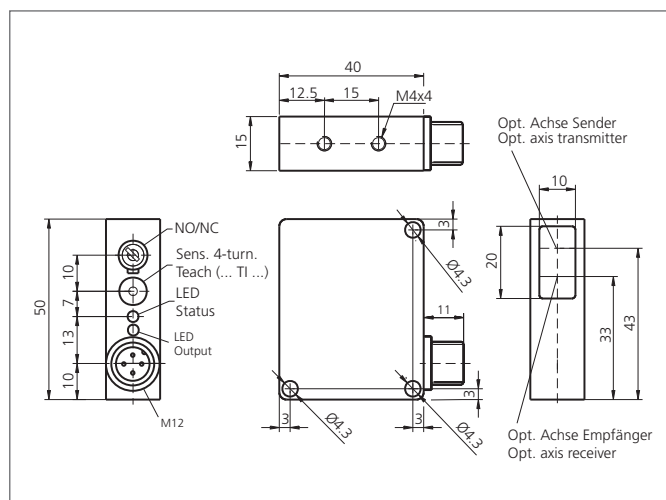

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Operating principle		Diffuse reflective sensor
Evaluation		digital
Size		50 x 40 x 15 mm (Dimensions)
Design		cuboid design
Emitted light		Red light laser, 650 nm, clocked
Laser class		1 (IEC 60825-1)
Service voltage		10 ... 35 V DC
Internal power consumption		< 30 mA
background suppression		no
Diameter of light spot		Ø 1,5 mm
Operating distance		100 ... 600 mm
Sensitivity adjustment		potentiometer
Switching output		pnp, 200 mA, NO/NC, switchable
Switching hysteresis		< 10 %
Voltage drop		< 2,0 V
Switching frequency		500 Hz
Reproducibility		< 2 %
Ambient temperature		-10 ... +50 °C
Ambient light immunity		5 kLx
Insulation voltage endurance		500 V
Protection class		IP 67
Protection degree		III, operation on protective low voltage
Casing material		Die-cast zinc black lacquered finish

LTV 51 M 600 P3K-IBS

Laser Diffuse Sensor



TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Material		polycarbonate (Window)
Connection		Connector, M12, 3-poled
Connecting cable		VK ...