


AV2-UND/ODER-PS-TS Connection Distributor


- Suitable for all kind of standard sensors
- Switching function AND/OR switchable
- Compact construction
- Simple and fast implementation of other functions
- High temperature resistance
- High protection class

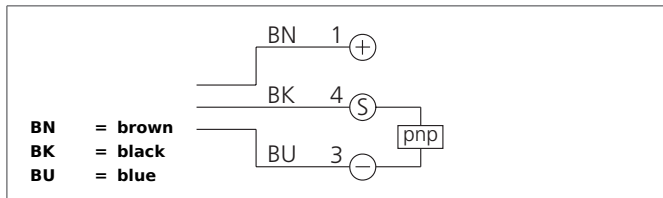

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

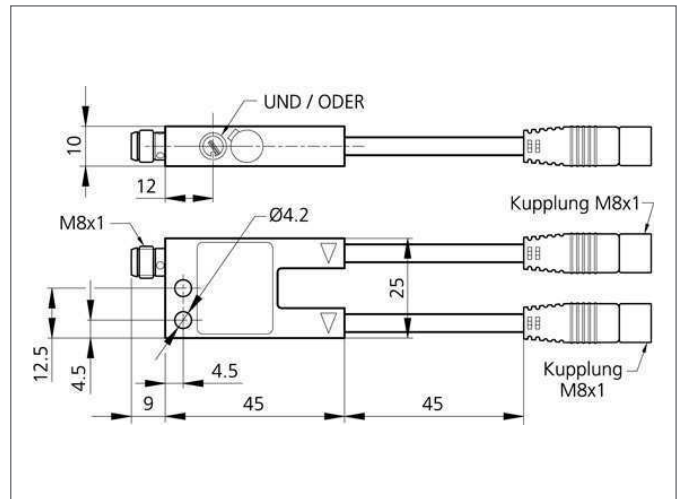

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Service voltage	10 ... 35 V DC
Internal power consumption	14 mA
Switching output	pnp, 200 mA, And/OR
Ambient temperature	-25 ... +70 °C
Protection class	IP 67
Casing material	Die-cast zinc black lacquered finish
Connection	Connector, M8, 3-poled