

OEV 12 M 10000 N1K-IBSL

Through Beam Sensor, Receiver


- Small design
- Red light
- High resolution, switching accuracy, switching frequency
- High operating distance
- LED indication of output state and functional reserve



Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

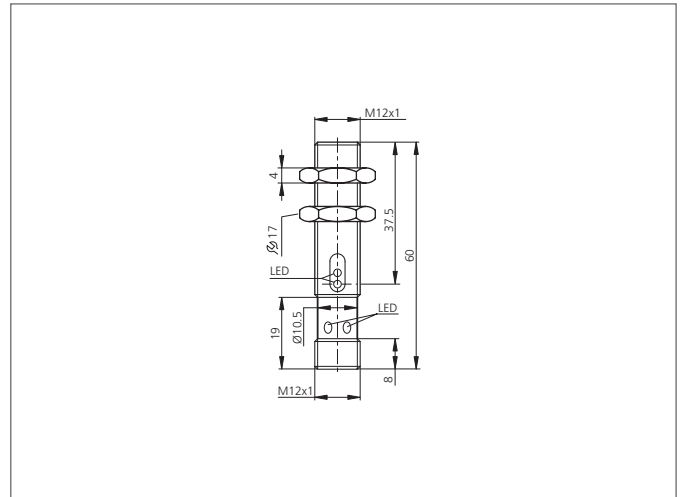

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Operating principle	Through beam sensors, receiver, switching output
Evaluation	digital
Size	M12 x 1 (thread)
Design	screw
Service voltage	10 ... 36 V DC
Internal power consumption	< 15 mA
Operating distance	0 ... 10.000 mm
Sensitivity adjustment	no setting elements
Switching output	npn, 200 mA, NC
Switching hysteresis	< 10 %
Voltage drop	< 2,0 V
Switching frequency	1.000 Hz
Response-/release time	< 0,5 ms / < 0,5 ms
Ambient temperature	-25 ... +55 °C
Temperature drift	0,5 %/K
Ambient light immunity	10 kLx
Insulation voltage endurance	1.000 V
Protection class	IP 67
Protection degree	III, operation on protective low voltage
Casing material	brass nickel plated
Material	glass (Window)
Connection	Connector, M12, 4-poled