TR 30
Test rod

- Reliable verification of the protected area
- Easy handling

Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.
The set-up of the products have to be made by skilled staff, only.
Repair exclusively made by di-soric.

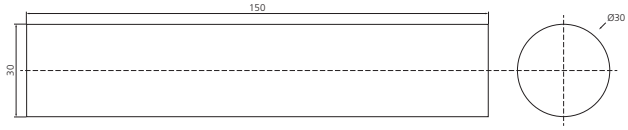

TECHNICAL INFORMATION (typ.)	
Operating principle	Test rod
Size	150 mm (Length/area) Ø 30 mm (Diameter)
For	Safety light curtains with 30 mm resolution
Material	Aluminium, matte surface (Test rod)