


VKHM-Z-5/RJ45 Ethernet-cable

- For Ethernet connection
- Drag chain compatible
- Oil-resistant

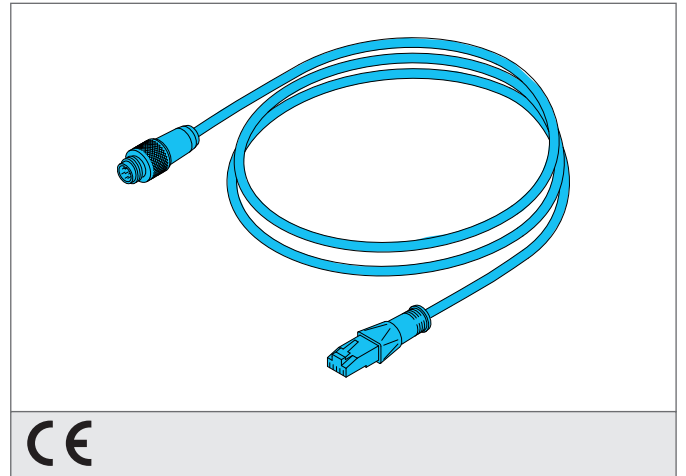

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Size	M12 x 1 (thread)
Design	straight
Length	5.000 mm
Service voltage	30 V DC
Ambient temperature	-40 ... +80 °C
Protection class	IP 67
Material	PUR (Cable)
Number of poles	8-poled
Connection	Connector M12 to connector RJ 45, 8-poled
Drag chain compatible	Yes
Drag chain properties	10 Mio (Bending cycles) 7.5 x Ø (Minimum bending radius) 180 m/min (Operation speed max.) 5 m/s ² (Acceleration max.) ≤ ± 30°/m (Torsion)