
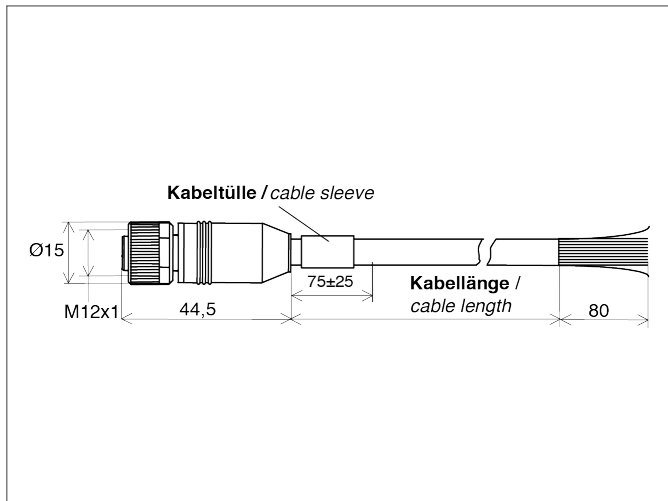
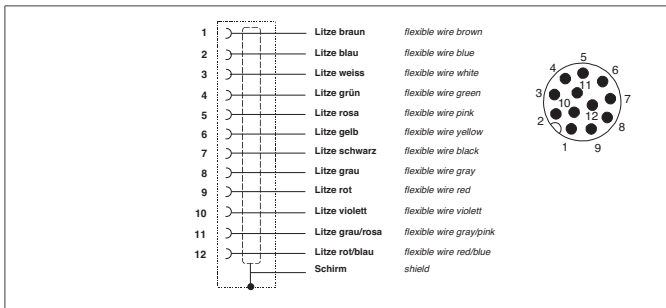


# VKSM-Z-20/12-A I/O-Cable

- Sturdy metal coupling ring
- Drag chain compatible
- Shielded
- Oil-resistant
- Chemically steadily

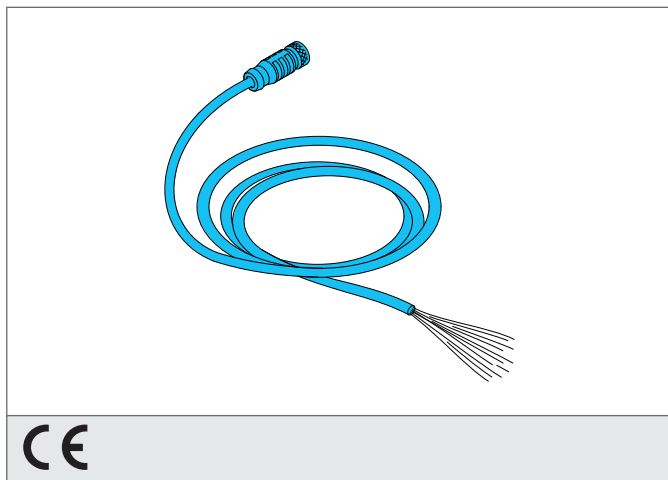

## Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments. These instruments shall exclusively be used by qualified personnel.

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Size		Ø 6,5 mm (Diameter) M12 x 1 (thread)
Design		straight
Length		20.000 mm
Characteristics		metal coupling ring
Service voltage		max. 30 V AC/DC
Ambient temperature		-25 ... +85 °C
Protection class		IP 67
Material		PUR (Cable)
Connection		Connector, M12, 12-poled, shielded, flying leads
Drag chain compatible		Yes
Drag chain properties		> 2 Mio (Bending cycles) 10 x Ø (Minimum bending radius) 180 m/min (Operation speed max.) 5 m/s <sup>2</sup> (Acceleration max.) ± 180°/m (Torsion)