


UCCR 40 K 20 SO-KL

Inductive Proximity Switch




- Service voltage 20 ... 250 V AC/DC
- Switching funktion NO/NC switchable

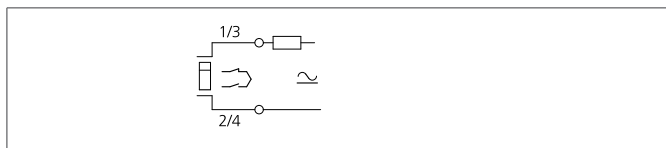

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

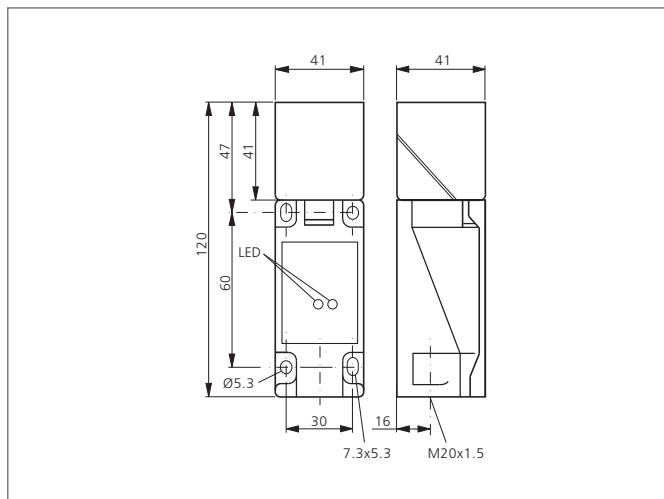

TECHNICAL INFORMATION (typ.)

Operating principle	Inductive
Evaluation	digital
Design	cuboid design
Mounting	flush
Operating distance	20 mm
Standardized measuring plate	60 x 60 x 1 mm
Service voltage	20 ... 250 V AC/DC
Switching hysteresis	< 15 %
Output current	400 mA
Switching frequency	15 Hz
Ambient temperature	-25 ... +70 °C
Insulation voltage endurance	500 V
Protection class	IP 54
Casing material	plastics (polyamide - PA 6.6)