
RS485-1.8-USB

Interface adapter



- Adapter USB 2.0 to serial RS 485, flying leads
- Speed up to 115.2 kb/s
- Easy installation

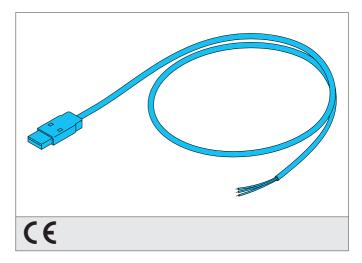


GND BK = Schwarz / black Data-(B) YE = Gelb / yellow Data+(A) OG = Orange / orange

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

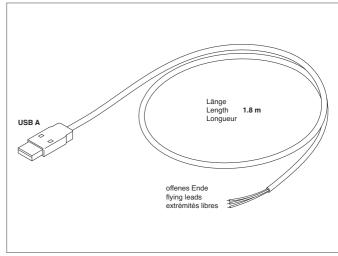

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Length	1.8 m
Characteristics	Supports Windows 7 32-bit and 64-bit, Supports Mac OS-X and up, Supports Linux Kernel 2.4 and up, Supports Windows 8/8.1 32-bit and 64-bit
For	Flash controller BC-100-20A
Connection	Connector USB A to flying leads