

DCC 30 M 15 POK-IBSL Inductive Proximity Switch


- Metal plug
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED



Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

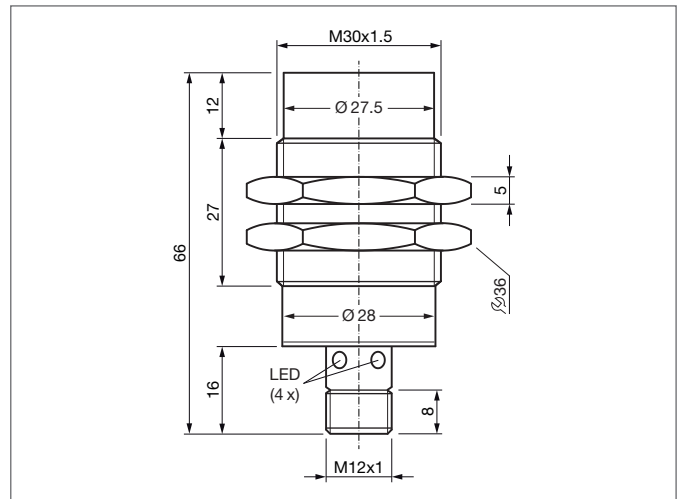

| TECHNICAL INFORMATION (typ.) | +20°C, 24V DC |
|------------------------------|-------------------------|
| Operating principle | Inductive |
| Evaluation | digital |
| Size | M30 x 1,5 (thread) |
| Design | screw |
| Mounting | non-flush |
| Operating distance | 15 mm |
| Standardized measuring plate | 45 x 45 x 1 mm |
| Service voltage | 10 ... 30 V DC |
| Internal power consumption | < 10 mA |
| Switching output | pnp, 200 mA, NC |
| Switching hysteresis | < 15 % |
| LED indicator | yes |
| Voltage drop | < 2,4 V |
| Switching frequency | 300 Hz |
| Ambient temperature | -25 ... +70 °C |
| Insulation voltage endurance | 500 V |
| Protection class | IP 67 |
| Casing material | brass nickel plated |
| Connection | Connector, M12, 4-poled |