


DCR 40 K 04 V PSK-TSL

Inductive Proximity Switch


- Metal plug
- Integrated amplifier
- Short-circuit protection
- LED

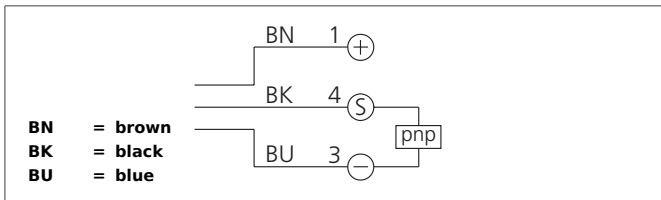

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

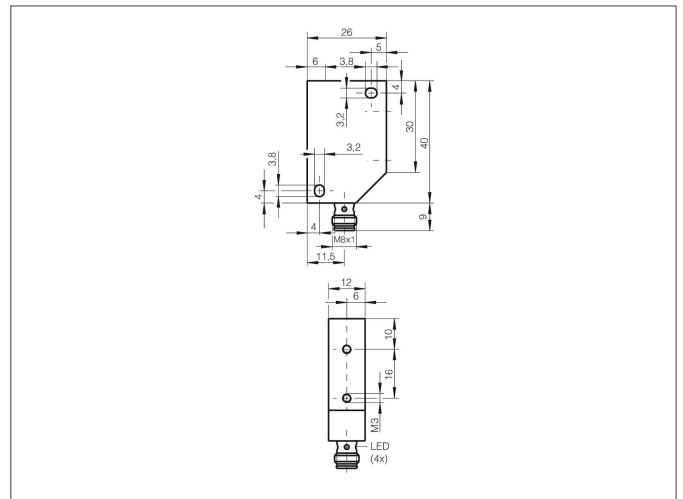

| TECHNICAL INFORMATION (typ.) | +20°C, 24V DC |
|------------------------------|------------------------------|
| Operating principle | Inductive |
| Evaluation | digital |
| Size | 40 x 26 x 12 mm (Dimensions) |
| Design | cuboid design |
| Mounting | non-flush |
| Operating distance | 4 mm |
| Standardized measuring plate | 12 x 12 x 1 mm |
| Service voltage | 10 ... 35 V DC |
| Internal power consumption | < 10 mA |
| Switching output | pnp, 200 mA, NO |
| Switching hysteresis | < 15 % |
| Voltage drop | < 2,4 V |
| Switching frequency | 800 Hz |
| Ambient temperature | -25 ... +70 °C |
| Insulation voltage endurance | 500 V |
| Protection class | IP 67 |
| Casing material | plastics |
| Connection | Connector, M8, 3-poled |