

MS-O4


MS - Expansion unit

- 4 inputs for Start / Restart interlock and external device monitoring (EDM)
- 4 OSSD pairs
- 4 programmable digital signal outputs
- Connection to MS-1 master via MS-SC proprietary bus
- MS-SC connector included



Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.
The set-up of the products have to be made by skilled staff, only.
Repair exclusively made by di-soric.

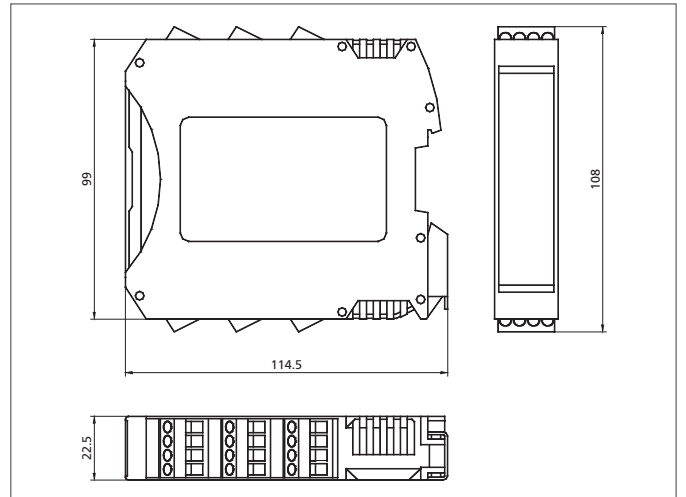

TECHNICAL INFORMATION (typ.)		+20°C, 24 V DC
Safety level		SIL 3 (IEC 61508), SILCL 3 (IEC 62061), PL e - Cat. 4 (EN ISO 13849-1)
Mounting		rail fastening according to EN 50022-35 standard
Operating principle		Output expansion unit
Size		99 x 22.5 x 114.5 mm (Dimensions)
Safety output		PNP (4 pairs OSSD), 400 mA / 24 V DC
Service voltage		19,2 ... 28,8 V DC
Display		LED for input / output status and failure diagnosis
Start / restart		4 inputs (EDM)
Ambient temperature		-10 ... +55 °C
Protection class		IP 20 for housing, IP 2X for terminal blocks
Casing material		polyamide (with locking latch mounting made of metal)
Connection		removable terminal blocks, screw contacts
Signal outputs		PNP (4x), 100 mA / 24 V DC, programmable
Communication		5-way high-speed bus 5.0
Scope of delivery		multi-language installation sheet, MS - Connector MS-SC