


SLI2-1503-WTHF


Safety light curtain in IP 69K protective housing

- Attractive priced solution for safety level 2
- Resolution for hand protection
- Heating function for low-temperature applications
- Light curtain integrated in protective enclosure - protection class IP 69K
- For use in the beverage and food industry
- Avoiding of condensate by GORE-valve
- ECOLAB approval
- Integrated safety function - no external safety relay required
- Parameterisation via connecting cable
- Selectable manual or automatic Start/Restart
- Feedback input for external relay monitoring (EDM)

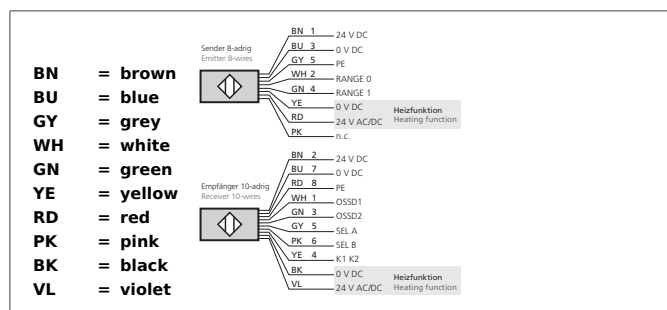

Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.
The set-up of the products have to be made by skilled staff, only.
Repair exclusively made by di-soric.

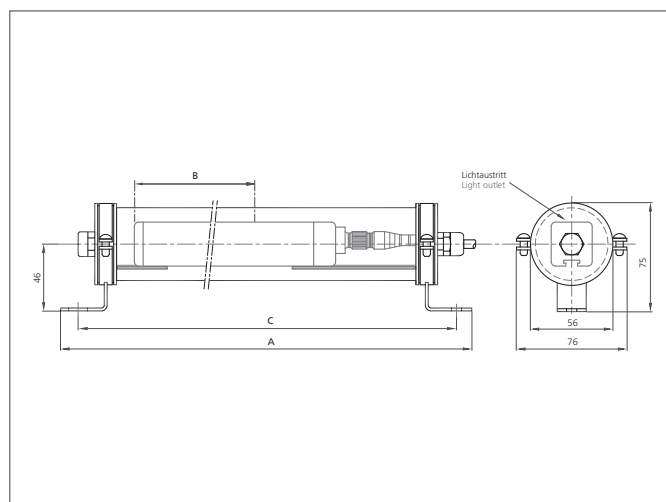

TECHNICAL INFORMATION (typ.)		+20°C, 24 V DC
Safety level		Type 2 (IEC/TS 61496-2), SIL 1 (IEC 61508), SILCL 1 (IEC 62061), PL c - Cat. 2 (EN ISO 13849-1)
Security level		Hand detection
Total height (A)		1.687 mm
Protective field height (B)		1.510 mm
Hole spacing		1.665 mm (C), ± 3 mm
Model		built-in control functions (EDM)
Models in enclosure		Watertight 80 bar and heated
Mounting		POM-C and stainless steel fastening brackets (AISI 316L)
Number of beams		76
Emitted light		Infrared, 950 nm
Safety output		PNP (2x), 400 mA / 24 V DC
Service voltage		19,2 ... 28,8 V DC
Power consumption with heating		30,2 W, (24 V DC)
Operating distance		3 m (Low Range) / 10 m (High Range)
Resolution		30 mm
Inverse polarity protection		Yes
Display		LEDs for light curtain's status and diagnostic
Start / restart		Automatic / manual (selectable)
External Device Monitoring - EDM		Feedback input, enabling selectable
Short-circuit protection		yes
Reaction time		19,5 ms
Self diagnostic		Every 500 ms (2 Hz)

SLI2-1503-WTHF

Safety light curtain in IP 69K protective housing

TECHNICAL INFORMATION (typ.)		+20°C, 24 V DC
Ambient temperature		-25 ... +55 °C
Protection class		IP 69K
Protection degree		III, operation on protective low voltage
Casing material		Aluminium
Material		polycarbonate (Window)
Material enclosure		PMMA enclosure (polymethyl methacrylate), POM-C sealing caps (acetal resin - DELRIN), GORE valve
Connection		pre-wired with cable gland, 10 m cable
Cable		8-wires transmitter, 10-wires receiver, flying leads
Scope of delivery		Emitter + receiver, CD-ROM containing the multi-language instruction manual, quick installation guide, POM-C and stainless steel fastening brackets