


# SLI4-601

## Safety light curtain

- Highest safety level
- Resolution for finger protection
- Protection area until end of profile
- Integrated safety function - no external safety relay required
- Parameterisation via connecting cable
- Selectable manual or automatic Start/Restart
- Feedpack input for external relay monitoring (EDM)
- Unshielded connecting cables to 100 m
- High protection class

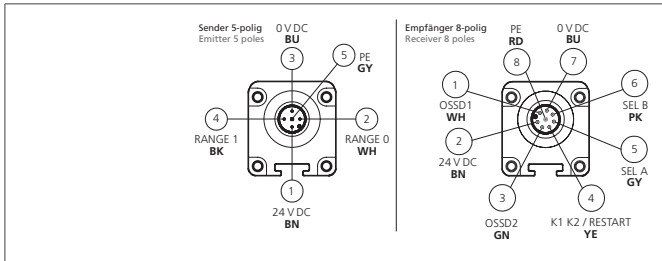

### Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to. The set-up of the products have to be made by skilled staff, only. Repair exclusively made by di-soric.



| TECHNICAL INFORMATION (typ.)     | +20°C, 24 V DC  |
|----------------------------------|---|
| Safety level                     | Type 4 (IEC/TS 61496-2), SIL 3 (IEC 61508), SILCL 3 (IEC 62061), PL e - Cat. 4 (EN ISO 13849-1) |
| Security level                   | Finger detection  |
| Total height (A)                 | 663 mm  |
| Protective field height (B)      | 610 mm  |
| Model                            | built-in control functions (EDM)  |
| Mounting                         | T-shaped slot (Backside), / Holder SFB E 180 (optional)   |
| Number of beams                  | 60  |
| Emitted light                    | Infrared, 950 nm  |
| Safety output                    | PNP (2x), 400 mA / 24 V DC  |
| Service voltage                  | 19,2 ... 28,8 V DC  |
| Operating distance               | 3 m (Low Range) / 6 m (High Range)  |
| Resolution                       | 14 mm   |
| Inverse polarity protection      | Yes   |
| Display                          | LEDs for light curtain's status and diagnostic  |
| Start / restart                  | Automatic / manual (selectable)   |
| External Device Monitoring - EDM | Feedback input, enabling selectable   |
| Short-circuit protection         | yes   |
| Reaction time                    | 9 ms  |
| Ambient temperature              | -20 ... +55 °C  |
| Protection class                 | IP 65, IP 67  |
| Protection degree                | III, operation on protective low voltage  |
| Casing material                  | Aluminium   |

# SLI4-601

## Safety light curtain



| <b>TECHNICAL INFORMATION (typ.)</b> |  | <b>+20°C, 24 V DC</b>   |
|-------------------------------------|--|---|
| Material                            |  | polycarbonate (Window)  |
| Connection                          |  | M12, 5poled for transmitter, M12, 8poled for receiver, Connector  |
| Cable                               |  | unshielded connection cables max. 100 m   |
| Scope of delivery                   |  | Emitter + receiver, one set of standard fixing brackets SA 4, CD-ROM containing the multi-language instruction manual, quick installation guide |