
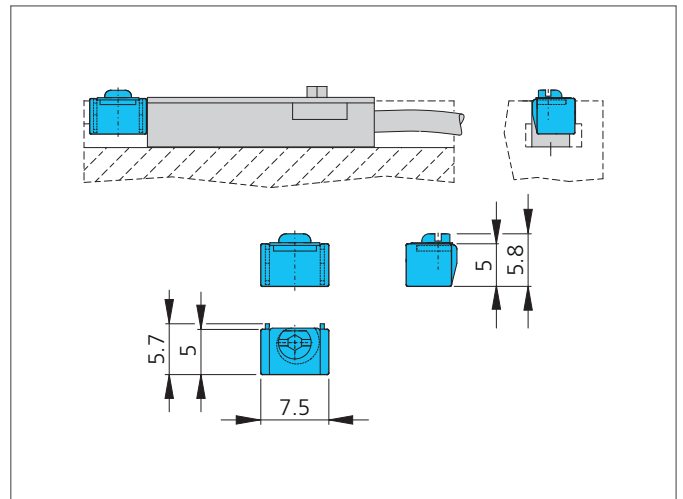


MZ-MB-T

Rubber placeholder

- Reliable determination of the mounting position when replacing cylinder sensors

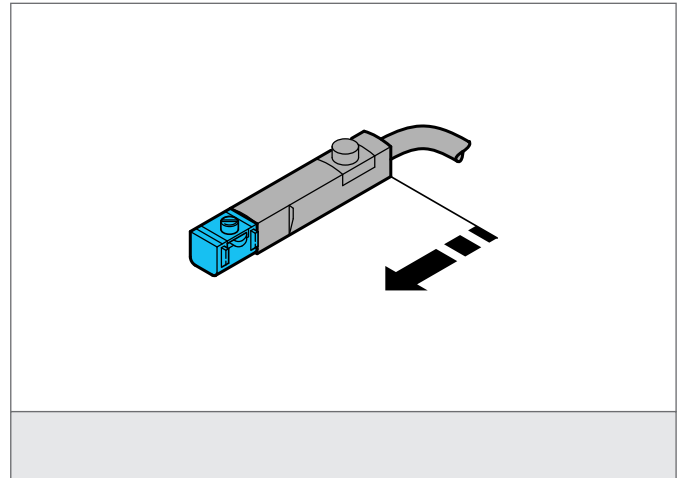

TECHNICAL INFORMATION (typ.)

For

Casing material

+20°C, 24V DC

Cylinder sensors with T-shaped slot

stainless steel, PA