


RTD Thermometer *omnigrad TST40N*

Contact thermometer - Fast response


M.I. cable

Threaded process connection and extension neck

With TIG welded reinforcing tube

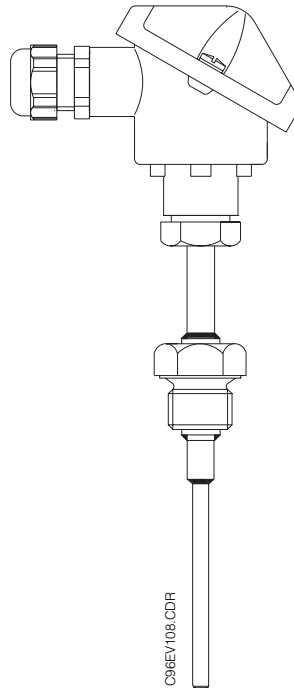

Gas & Metrical
Connection

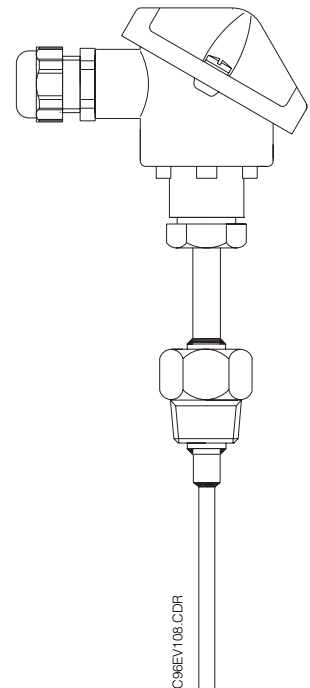

NPT Connection

Description

TST40N RTD thermometer assembly is a resistance thermometer with threaded process connection and a very short response time. It includes a single or double Pt100 inset, in mineral insulated cable, directly in contact with the process, a TIG welded reinforcing tube, a terminal head and a threaded process connection.

The Pt100 inset is available either with flying leads for head transmitter mounting or with terminal block.

RTD can be selected between standard or glass type (for high vibration level application).

The reinforcing tube, the immersion and extension lengths can be chosen according to process requirements.

A wide choice of standard threaded process connections and terminal heads is available; other versions can be ordered according to specifications.

Application

TST40N RTD thermometer is a general purpose assembly suitable for liquids and gases.



Technical data

Mineral Insulated Inset (not replaceable)

Sensing element: Platinum resistance, 1 or 2 x Pt100 Ω at 0°C, standard or glass type
 Tolerances: class A or B to IEC 751, 1/3 DIN B

Operating temperature:

Tip diameter (mm)	Pipe diameter (mm)	RTD element type	Operating temperature (°C)
6	9	standard	-50 ÷ +600
6	9	glass	-50 ÷ +400
3	6	standard	-50 ÷ +400
3	6	glass	-50 ÷ +400

Table A

Wiring: 3 or 4 wire connections
 Insulation resistance: $\geq 100 \text{ M}\Omega$, test voltage 250 V at ambient temperature
 Electrical connections: flying leads or terminal block
 Stem: mineral insulated cable
 Sheath: AISI316L / W.1.4404
 Standard diameter: 6 mm or 3 mm
 Response time values: according to IEC 751, in moving water at 0.4 m/s
 $T_{50} = 3.5 \text{ s}$; $T_{90} = 8 \text{ s}$ for $\varnothing 6 \text{ mm}$
 $T_{50} = 3 \text{ s}$; $T_{90} = 6 \text{ s}$ for $\varnothing 3 \text{ mm}$

Reinforcing tube (pipe)

Standard diameter: 9 mm or 6 mm
 Standard material: AISI316L / W.1.4404

Process connection:



Engaging thread	Threaded	mm	
 NPT	C	1/2" NPT	8
		3/4" NPT	8.5
		1" NPT	10
 GAS METRICAL	D	G 1/2" DIN 43763	15
		G 1/2"	20
		G 3/4"	20
		G 1" DIN 43763	31.5
		G 1"	25
		M20 DIN 16179	14
		M27 x 2	19

Table B

Terminal head

Version: refer to Order key
 Protection class: typical IP65
 Electrical connections: PG11, PG16, M20 x 1.5 depending on head version

Built-in transmitter

(*)	Features	Model
A	Transmitter 4-20mA, 0...+50°C	Analogue - Fixed range TMT137
B	Transmitter 4-20mA, 0...+100°C	
C	Transmitter 4-20mA, 0...+150°C	
D	Transmitter 4-20mA, 0...+200°C	
F	Analogue output without I/O isolation	PC Programmable
G	Analogue output with I/O isolation	TMD831
J	Hart, Analogue with I/O isolation	Hart protocol - TMD832
L	Profibus-PA with I/O isolation	Fieldbus - TMD834
0	None	Others
1	Ordered separately	
9	Built-in transmitter as specified	
Product designation for built-in transmitter		

Table C - Note (*): refer to Order key

Supplementary Documentation

- TA20 terminal heads
Technical Information TI072T/02/en
- TST General Information
Technical Information TI088T/02/en

Export Division

Endress+Hauser
Instruments International
GmbH + Co.
P.O. Box 2222
D-79574 Weil am Rhein
Germany
Tel. (07621) 975-02
Tx 7-73-926
Fax (07621) 9-75-345

