


Thermopocket *omnigrad TA414*

Medium duty - General purpose
G1/2" process connection

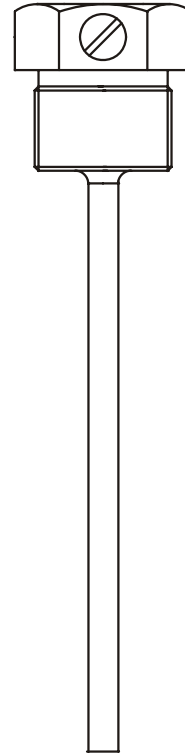

Description

TA414 is an industry standard pocket with locking screw.
The process connection is threaded.
The pocket stem shape is straight.
The insertion length can be chosen according to process requirements.

Application

TA414 is used to match RTD thermometers, as TST414, to protect the probe from chemical corrosion.
The locking screw fastens the thermometer in place and allows an easy replacement of the thermometer.
Due to the reduced wall thickness, it is suggested to use TA414 in processes where no strong flow is present.



Technical data


Pipe	Size:	4.5 x 3 mm
	Standard material:	AISI316Ti/W.1.4571

Connection to thermometer	Type:	locking screw
----------------------------------	-------	---------------

Process connection	Threaded:	G1/2" M
---------------------------	-----------	---------

Tip	Bottom shape:	straight
	Bottom thickness:	3 mm

Order key

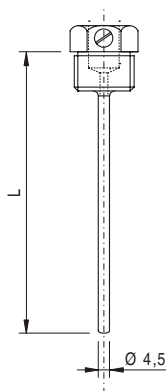

(note: all dimensions in millimeters)

TA414- THERMOPOCKET - Medium duty - General purpose
G1/2" process connection

Length L (50-4000mm)

A 50 mm length L
B 100 mm length L
C 200 mm length L
D 300 mm length L
E 400 mm length L
F 500 mm length L
X mm length to specification
Y mm special length

Pipe material, price 100mm L

1 Pipe material SS 316Ti-W1.4571

TA414-			Complete Order Code
---------------	--	--	----------------------------

Endress+Hauser
GmbH+Co.
Instruments International
P.O. Box 2222
D-79574 Weil am Rhein
Germany

Tel. (07621) 975-02
Tx 773926
Fax (07621) 975 345
<http://www.endress.com>
info@ii.endress.com

Endress + Hauser
The Power of Know How

