

Technical data sheet · LUTZE-SILFLEX® N PUR

PUR control cables · unshielded



| | | |
|-----------------------|----------|----------------|
| Identification | Type | SI N PUR 3G2,5 |
| | Part-No. | 111102 |

Use/Application/Characteristics

| | |
|-----------------|---|
| Application | <ul style="list-style-type: none">• Machine and device construction, transport and conveyor technology, HVAC technology• In areas with high concentrations of people or material assets, where corrosive gases need to be avoided in the event of fire• As a monitoring, measurement and control cable for industrial applications• Especially for rough environments• For flexible applications without continuous flexing |
| Characteristics | <ul style="list-style-type: none">• Low capacitance, very good electrical properties• Flexible in cold environments• Halogen-free, no corrosive gases• Low adhesion, Abrasion-resistant, Tear resistant• Hydrolysis-resistant, microbe-resistant, and rot-resistant• Weatherproof, ozone and UV resistant (normal lighting conditions)• Good ruggedness and salt water resistance• Excellent coolant and lubricant resistance• Resistant to most oils, greases, alcohol-free benzines and kerosene• Silicone free• RoHS-compliant |

Construction

| | |
|------------------------------------|---------------|
| Description | Silflex N PUR |
| Number of conductors/cross-section | 3G2.5 |

27.01.2017 – Subject to technical modification

Part-No. 111102

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LUTZE-SILFLEX® N PUR

| | |
|-----------------|-----------------------|
| Jacket material | PUR |
| Jacket color | grey RAL 7001 |
| Outer Ø | 7.8 mm |
| Surface | adhesion-free matt |
| Weight | 11.4 kg/100 m |
| Cu-Index | 7.2 kg/100 m |

Element 1

| | |
|-------------------------------|--|
| Element construction | 3G2,5 |
| Conductor | CU-wire bare |
| Conductor category | IEC 60228, Class 5 DIN EN 13602 Finely stranded DIN VDE 0295 |
| Conductor marking | black with white number print green/yellow |
| Conductor insulation | Special TPE |
| Conductor insulation standard | in Anlehnung an VDE 0207 |

overall construction

| | |
|------------------------|---|
| Overall stranding | stranded layers |
| Jacket characteristics | Halogen free hydrolysis-resistant microbe resistant rot-resistant Weather resistant UV resistant (normal lighting conditions) ozone-resistant service water-resistant salt water-resistant coolant-resistant lubricant-resistant Silicone-free Oil resistant grease-resistant petrol-resistant (alcohol-free) kerosene-resistant |

Technical data

| | |
|--------------------------|-------------------|
| Rated voltage U_0/U | 300/500 V |
| Test voltage type | AC 3000 V |
| Temperature range moving | -25 °C ... +80 °C |
| Temperature range fixed | -40 °C ... +80 °C |

27.01.2017 – Subject to technical modification

Part-No. 111102

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LUTZE-SILFLEX[®]N PUR

| | |
|-------------------------------|------|
| Minimum bending radius moving | 10×D |
| Minimum bending radius fixed | 4×D |

Element 1

| | |
|-------------------------------|-------------|
| Element construction | 3G2,5 |
| Insulation resistance at 20°C | 100.0 MΩ×km |


Approvals/Standards

| | |
|---------------------------|-------------------------------|
| Conformity | CE RoHS |
| Halogen free according to | IEC 60754-1 DIN EN 60754-1 |

General

| | |
|------|--|
| Note | CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU |
|------|--|

Symbols

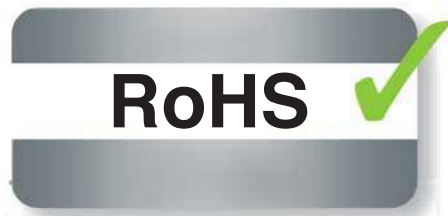

27.01.2017 – Subject to technical modification

Part-No. 111102

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk