

Technical data sheet · LÜTZE SUPERFLEX[®] PLUS N (C) PUR 300 V

For highest requirements



PUR control cables · C-track compatible · shielded

Identification	Type	SU+N(C)PUR(12G0,75)UL 300V
	Part-No.	113309

Use/Application/Characteristics

Application	<ul style="list-style-type: none">• Machine and device construction, transport and conveyor technology, HVAC technology• In areas with high concentrations of people or material assets, where corrosive gases need to be avoided in the event of fire• As a monitoring, measurement and control cable for industrial applications• Especially for rough environments• For installation in energy chains with constant linear movement• Anywhere where electrical interference fields can influence the signal transmission
-------------	--

17.02.2017 – Subject to technical modification

Part-No. 113309

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SUPERFLEX® PLUS N (C) PUR 300 V

For highest requirements

Characteristics	<ul style="list-style-type: none"> • Reduced friction due to very smooth conductor insulation (HGI) for high mechanical loads • High active and passive interference resistance (EMC) • Braided shield optimized for continuous flexing applications • Low capacitance, very good electrical properties • Flame-retardant, self-extinguishing • Halogen-free, no corrosive gases • Very good flexing strength • Low adhesion, Abrasion-resistant, Tear resistant • Hydrolysis-resistant, microbe-resistant, and rot-resistant • Weathering, ozone and UV resistant (normal lighting conditions) • Good resistance to wear and salt water • Excellent coolant and lubricant resistance • Largely resistant to oils, greases, alcohol-free benzines and kerosene • Silicone free • RoHS-compliant
-----------------	--

Construction

Description	SUPERFLEX PLUS N (C) PUR 300 V
Number of conductors/cross-section	(12G0.75)
Jacket material	PUR
Jacket color	grey RAL 7001
Outer Ø	11.3 mm
Weight	18.8 kg/100 m
Cu-Index	12 kg/100 m

Element 1

Element construction	(12G0,75)
Conductor	CU-wire bare
Conductor category	IEC 60228, Class 6 Superfinely stranded DIN VDE 0295 Klasse 6
Conductor marking	black with white number print green/yellow
Conductor insulation	Special TPE

overall construction

Overall stranding	Conductors stranded layers schlaglängenoptimiert Conductors twisted without mechanical stress
Overall wrapping	Non-woven material
Inner jacket	TPE

17.02.2017 – Subject to technical modification

Part-No. 113309

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SUPERFLEX[®] PLUS N (C) PUR 300 V

For highest requirements

Overall shield	Braid shield Tinned copper wires optical cover approx. 85%
Jacket characteristics	Flame-retardant self-extinguishing Oil resistant grease-resistant petrol-resistant (alcohol-free) kerosene-resistant Silicone-free Halogen free

Technical data

Rated voltage U_0/U	300/500 V
Rated voltage UL	300 V
Test voltage type	AC 3000 V
Temperature range moving	-25 °C ... +80 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	10×D
Minimum bending radius fixed	6×D

Element 1

Element construction	(12G0,75)
Insulation resistance at 20°C	1000.0 MΩ×km
Operating capacitance Ader-Ader	75 pF/m
Operating capacitance wire-shield	108 pF/m

Approvals/Standards

Approvals	cURus
UL style	AWM 20233
Conformity	CE RoHS REACH
Burning behavior	IEC 60332-1 DIN EN 60332-1-2 VDE 0482 322-1-2
Halogen free according to	DIN EN 60754-1 IEC 60754-1

General

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--

17.02.2017 – Subject to technical modification

Part-No. 113309

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SUPERFLEX® PLUS N (C) PUR 300 V

For highest requirements

Symbols

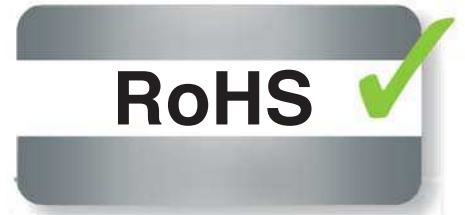

17.02.2017 – Subject to technical modification

Part-No. 113309

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk