

Technical data sheet · LÜTZE SUPERFLEX[®] TRONIC PUR
Unshielded electronic cable UL recognized
For highest requirements



PUR electronic cables · C-track compatible · Unshielded

Identification	Type	SU TR PUR 12×0,34
	Part-No.	117054

Use/Application/Characteristics

Application	<ul style="list-style-type: none"> • Robots, drag chains as well as everywhere where signals are transmitted to continuously moving system or machine parts • Machine and device construction, transport and conveyor technology, heating, climate technology • In dry and damp rooms • As monitoring, measurement and control cable for continuous flexing applications
Characteristics	<ul style="list-style-type: none"> • Low capacitance, very good electrical properties • Flame-retardant, self-extinguishing • Halogen-free, no corrosive gases • Very good flexing strength • Low adhesion, abrasion-resistant, nick-resistant, tear resistant • Hydrolysis-resistant, microbe-resistant, and rot-resistant • Good ruggedness and salt water resistance • Excellent coolant and lubricant resistance • Resistant to most oils, greases, alcohol-free benzines and kerosene • Silicone free • RoHS-compliant

Construction

28.04.2017 – Subject to technical modification

Part-No. 117054

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
 www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
 www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SUPERFLEX[®] TRONIC PUR

Unshielded electronic cable UL recognized

For highest requirements

Description	SUPERFLEX TRONIC PUR
Number of conductors/cross-section	12×0.34
Jacket material	PUR
Jacket color	grey RAL 7001
Outer Ø	6.9 mm
Outer Ø	0.271 inches
Surface	adhesion-free matt
Weight	6.8 kg/100 m
Weight	44 Lbs/Mft
Cu-Index	4 kg/100 m
Cu-Index	25 Lbs/Mft

Element 1

Element construction	12×0.34
Conductor	CU-wire bare
Conductor category	IEC 60228, Class 6 Superfinely stranded DIN VDE 0295 class 6
Conductor marking	Colour coded
Conductor marking standard	DIN 47100
Conductor insulation	Special TPE

overall construction

Overall stranding	Conductors stranded layers layer pitch optimised Conductors twisted without mechanical stress
Overall wrapping	Non-woven material
Jacket characteristics	Flame-retardant self-extinguishing Halogen free Oil resistant grease-resistant petrol-resistant (alcohol-free) kerosene-resistant Silicone-free

Technical data

Rated voltage	300 V
Test voltage type	AC 3000 V
Temperature according to UL	80 °C

28.04.2017 – Subject to technical modification

Part-No. 117054

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SUPERFLEX[®] TRONIC PUR

Unshielded electronic cable UL recognized

For highest requirements

Temperature range moving	-25 °C ... +80 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	10×D
Minimum bending radius fixed	4×D

Element 1

Element construction	12×0.34
Insulation resistance at 20°C	1000 MΩ×km


Approvals/Standards

Approvals	UR
UL style	AWM 20549
Conformity	CE RoHS
Burning behavior according to	DIN EN 60332-2-2 UL 1581 Horizontal Flame Test
Oil resistant according to	DIN EN 60811-404
Halogen free according to	IEC 60754-1 DIN EN 60754-1

General

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--

Symbols

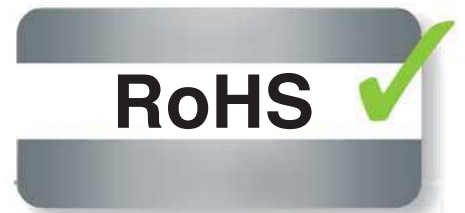

28.04.2017 – Subject to technical modification

Part-No. 117054

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY