

Technical data sheet · LÜTZE SUPERFLEX[®] TRONIC (C) PUR

Shielded electronic cable UL recognized

For highest requirements



PUR electronic cables · C-track compatible · Shielded

Identification	Type	SU TR(C)PUR(5×0,34)
	Part-No.	117111

Use/Application/Characteristics

Application

- Robots, drag chains as well as everywhere where signals are transmitted to continuously moving system or machine parts
- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and damp rooms
- As monitoring, measurement and control cable for continuous flexing applications
- Especially for industrial environments with high EMI potential in machine, plant and device construction

28.04.2017 – Subject to technical modification

Part-No. 117111

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SUPERFLEX[®] TRONIC (C) PUR

Shielded electronic cable UL recognized

For highest requirements

Characteristics	<ul style="list-style-type: none"> • High active and passive interference resistance (EMC) • Braided shield optimized for continuous flexing applications • Low capacitance, very good electrical properties • Flame-retardant, self-extinguishing • Halogen-free, no corrosive gases • Very good flexing strength • Low adhesion, Abrasion-resistant, Tear resistant • Hydrolysis-resistant, microbe-resistant, and rot-resistant • Good resistance to wear and salt water • Excellent coolant and lubricant resistance • Largely resistant to oils, greases, alcohol-free benzines and kerosene • Silicone free • RoHS-compliant
-----------------	---

Construction

Description	SUPERFLEX TRONIC (C) PUR
Number of conductors/cross-section	(5×0.34)
Jacket material	PUR
Jacket color	grey RAL 7001
Outer Ø	5.4 mm
Outer Ø	0.213 inches
Surface	adhesion-free matt
Weight	4.3 kg/100 m
Weight	31 Lbs/Mft
Cu-Index	2.8 kg/100 m
Cu-Index	19 Lbs/Mft

Element 1

Element construction	(5×0.34)
Conductor	CU-wire bare
Conductor category	IEC 60228, Class 6 Superfinely stranded DIN VDE 0295 class 6
Conductor marking	Colour coded
Conductor marking standard	DIN 47100
Conductor insulation	Special TPE

overall construction

Overall stranding	Conductors stranded layers layer pitch optimised Conductors twisted without mechanical stress
-------------------	---

28.04.2017 – Subject to technical modification

Part-No. 117111

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SUPERFLEX[®] TRONIC (C) PUR

Shielded electronic cable UL recognized

For highest requirements

Overall wrapping	Non-woven material
Overall shield	Braid shield Tinned copper wires optical cover approx. 85%
Jacket characteristics	Flame-retardant self-extinguishing Halogen free Oil resistant grease-resistant petrol-resistant (alcohol-free) kerosene-resistant Silicone-free

Technical data

Rated voltage	300 V
Test voltage type	AC 3000 V
Temperature according to UL	80 °C
Temperature range moving	-25 °C ... +80 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	12×D
Minimum bending radius fixed	6×D

Element 1

Element construction	(5×0.34)
Insulation resistance at 20°C	1000 MΩ×km

Approvals/Standards

Approvals	UR
UL style	AWM 20549
Conformity	CE RoHS
Burning behavior according to	DIN EN 60332-2-2 UL 1581 Horizontal Flame Test
Oil resistant according to	DIN EN 60811-404
Halogen free according to	IEC 60754-1 DIN EN 60754-1

General

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--

28.04.2017 – Subject to technical modification

Part-No. 117111

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.


Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SUPERFLEX® TRONIC (C) PUR
Shielded electronic cable UL recognized
For highest requirements

Symbols

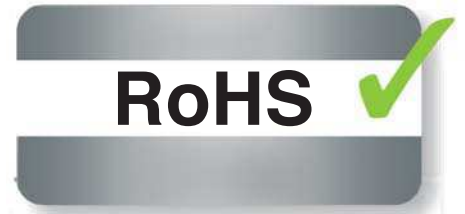

28.04.2017 – Subject to technical modification

Part-No. 117111

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk