

Servomotor Cable Assemblies for stationary applications

Identification Type 2090-CPWM7DF-12AA10

Part-No. 193352.1000

System Allen Bradley

Allen Bradley 2090-CPWM7DF-12AA10

designation*

Use/Application/Characteristics

Application • For Allen-Bradley standard

 Connecting lead especially for frequency converters and servo drives in machine and plant construction, transport and conveyor technology

Conform with NFPA79 for machine tool wiring

· Very suitable for extreme operating conditions and high interference signals

In dry, damp and wet environment

Especially for industrial environments in mechanical and system engineering

High active and passive interference resistance (EMC)

Easy installation

· Resistant to most mineral and vegetable-based cutting oils

UV-resistant

Silicone and talcum free

RoHS compliant

Technical data

Characteristics

Number of conductors/cross-section (4GAWG12)

Number of conductors

Outer \emptyset 13.1 mm

29.04.2017 - Subject to technical modification

Part-No. 193352.1000 USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd. Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2



Cable length 10 m

Rated voltage 600 V UL TC 600 V UL MTW

600 V UL AWM 105 °C

1000 V WTTC

600/1000

Test voltage 4000 VInsulation resistance $> 500 \text{ M}\Omega \times \text{km}$ Temperature range fixed -40 °C ... +90 °C

Temperature range moving -5 °C ... +90 °C

Minimum bending radius fixed $6\times D$ Minimum bending radius moving $15\times D$ Approvals cULus

TC-ER UL MTW WTTC

Art. 336, 392, 501 Class 1 Div. 2 per NEC

CUL TC CIC FT4 UL 1277

Cable used A3161204

Product photo The product photos are not to scale and do not represent detailed images of the re-

spective products.

Construction

Rated voltage U₀/U

Number of conductors/cross-section (4GAWG12)

Number of conductors 4

Conductor AWG conductor

Conductor marking brown black

blue

Control pair colour-coded black, white

with foil tape and braided shield

Conductor insulation Special PVC

Overall stranding Conductors twisted without mechanical stress

Overall shield Braid shield

Tinned copper wires optical cover approx. 85%

Jacket material Special TPE

Surface matt

adhesion-free

Jacket color orange RAL 2003

29.04.2017 - Subject to technical modification

Part-No. 193352.1000 USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

 $www.lutze.com ~ \cdot info@lutze.com \\$

United Kingdom: LÜTZE Ltd. Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2



General

Note

* Allen-Bradley article designations are registered trademarks of Rockwell Allen Bradley, and are for reference purposes only

Ordering instructions:

The LÜTZE Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design 4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- · No minimum order quantity
- · All intermediate lengths in steps of 0.5 m are available within a short time
- · When ordering, please specify serial number and length key
- · Additional types on request

29.04.2017 - Subject to technical modification

Part-No. 193352.1000 USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223


Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • info@lutze.com United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU



Symbols

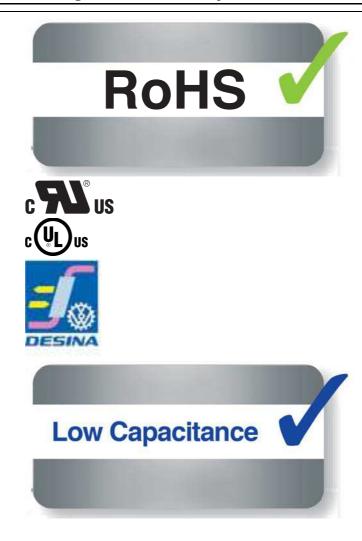

29.04.2017 – Subject to technical modification

Part-No. 193352.1000 USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

 $www.lutze.com ~ \cdot ~ info@lutze.com \\$

United Kingdom: LÜTZE Ltd. Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

