

Technical data sheet · According to Allen-Bradley 2090 standard



Servomotor Cable Assemblies
for C-tracks

Identification	Type	2090-CPBM4DF-16AF10
	Part-No.	193985.1000
System	Allen Bradley	
Allen Bradley designation*	2090-CPBM4DF-16AF10	

Use/Application/Characteristics

Application	<ul style="list-style-type: none">• Servo cables for Allen Bradley drives• Due to optimized cable construction optimally suited for continuous flexing applications in C-tracks• Very good resistance against aggressive coolants and lubricants• Especially for industrial environments in machines and plants
Characteristics	<ul style="list-style-type: none">• High active and passive interference resistance (EMC)• Silicone free• RoHS compliant

Technical data

Number of conductors/cross-section	(4G1.5+(2×1.5))
Number of conductors	8
Outer Ø	12.9 mm
Cable length	10 m
Rated voltage	1000 V 80 °C
Rated voltage U ₀ /U	600/1000
Test voltage	4000 V
Insulation resistance	> 500 MΩ × km

29.04.2017 – Subject to technical modification

Part-No. 193985.1000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet - According to Allen-Bradley 2090 standard

Temperature range fixed	-40 °C ... +80 °C
Temperature range moving	-25 °C ... +80 °C
Minimum bending radius fixed	6×D
Minimum bending radius moving	10×D
Burning behavior according to	VDE 0482 Part 265-2 IEC 60332-1 UL 1581 Part 1080 VW-1 UL FT1
Halogen free according to	EN 50267-2-1
Approvals	cURus UL AWM 21223
Cable used	111420
Product photo	The product photos are not to scale and do not represent detailed images of the respective products.

Construction

Number of conductors/cross-section	(4G1.5+(2×1.5))
Number of conductors	8
Conductor	CU-wire bare
Conductor category	Superfinely stranded DIN VDE 0295 IEC 60228, Class 6
Conductor marking	Power conductors black with numbered print U/L1/C/L+, V/L2, W/L3/D/L-
Control pair	colour-coded (bw, wb) or numbered (5/6/7/8) with foil tape and braided shield
Conductor insulation	Special TPE
Overall stranding	Conductors twisted without mechanical stress
Overall wrapping	Non-woven material over the cable core
Overall shield	Braid shield Tinned copper wires optical cover approx. 85%
Jacket material	PUR
Surface	matt adhesion-free
Jacket color	orange RAL 2003

General

Note	* Allen-Bradley article designations are registered trademarks of Rockwell Allen Bradley, and are for reference purposes only
------	---

29.04.2017 – Subject to technical modification

Part-No. 193985.1000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet - According to Allen-Bradley 2090 standard

Ordering instructions:

The LÜTZE Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

29.04.2017 – Subject to technical modification

Part-No. 193985.1000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU


Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Symbols

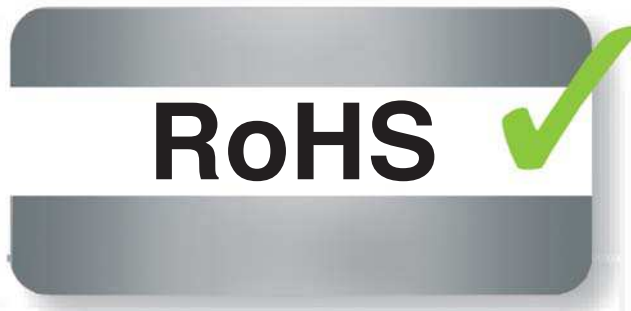

29.04.2017 – Subject to technical modification

Part-No. 193985.1000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY