

# Technical data sheet · According to SIEMENS-6FX5002 standard

## Extension



Servo cable assemblies without  
brake pairs for fixed installation

|                       |                    |                    |
|-----------------------|--------------------|--------------------|
| <b>Identification</b> | Type               | 6FX5002-5CA58-1BA0 |
|                       | Part-No.           | 198064.1000        |
| System                | Siemens            |                    |
| SIEMENS designation*  | 6FX5002-5CA58-1BA0 |                    |

### Use/Application/Characteristics

|                 |  |
|-----------------|--|
| Application     | <ul style="list-style-type: none"> <li>• Extension cable for Siemens servo drives</li> <li>• For flexible applications without continuous flexing</li> </ul> |
| Characteristics | <ul style="list-style-type: none"> <li>• PVC Flame-retardant, self-extinguishing</li> <li>• Silicone free</li> <li>• RoHS-compliant</li> </ul>               |

### Technical data

|                                    |                   |
|------------------------------------|-------------------|
| Number of conductors/cross-section | (4G6)             |
| Number of conductors               | 4                 |
| Outer Ø                            | 13.2 mm           |
| Cable length                       | 10 m              |
| Rated voltage                      | 1000 V 80 °C      |
| Rated voltage $U_0/U$              | 600/1000          |
| Test voltage                       | 4000 V            |
| Insulation resistance              | > 500 MΩ × km     |
| Temperature range fixed            | -25 °C ... +80 °C |
| Temperature range moving           | -5 °C ... +80 °C  |

29.04.2017 – Subject to technical modification

Part-No. 198064.1000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

# Technical data sheet · According to SIEMENS-6FX5002 standard

## Extension

---

|                               |  |
|-------------------------------|--|
| Minimum bending radius fixed  | 6×D  |
| Minimum bending radius moving | 10×D   |
| Burning behavior according to | VDE 0482 Part 265-2<br>DIN EN 50265-2<br>IEC 60332-1<br>UL 1581 Part 1080 VW-1<br>UL FT1             |
| Approvals                     | cURus  |
| Cable used                    | 116404   |
| Product photo                 | The product photos are not to scale and do not represent detailed images of the respective products. |

---

### Construction

---

|                                    |   |
|------------------------------------|---|
| Number of conductors/cross-section | (4G6)   |
| Number of conductors               | 4   |
| Conductor                          | CU-wire bare  |
| Conductor category                 | Finely stranded DIN VDE 0295<br>IEC 60228, Class 5                    |
| Conductor marking                  | Power conductors black with numbered print U/L1/C/L+, V/L2, W/L3/D/L- |
| Conductor insulation               | Special PP  |
| Overall wrapping                   | Non-woven material<br>over the cable core                             |
| Overall shield                     | Braid shield<br>Tinned copper wires<br>optical cover approx. 85%      |
| Jacket material                    | PVC   |
| Jacket color                       | orange RAL 2003   |

---

### General

---

|      |   |
|------|---|
| Note | * Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only |
|------|---|

#### Ordering instructions:

**The LÜTZE Art. no. consists of two blocks that are separated by a dot:  
6 digits before the dot: technical design  
4 digits after the dot: length code in cm  
Ex.: 198360.0500 corresponds to a length of 5.0 m**

#### Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

29.04.2017 – Subject to technical modification

Part-No. 198064.1000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

# Technical data sheet · According to SIEMENS-6FX5002 standard

## Extension


---

### Comments

### Notes:

- The extension can also be used for **SPEED-CONNECT** plug connection, for this the O-ring must be removed on the outer thread. This does not affect the tightness of the plug connection.
- 

### Symbols

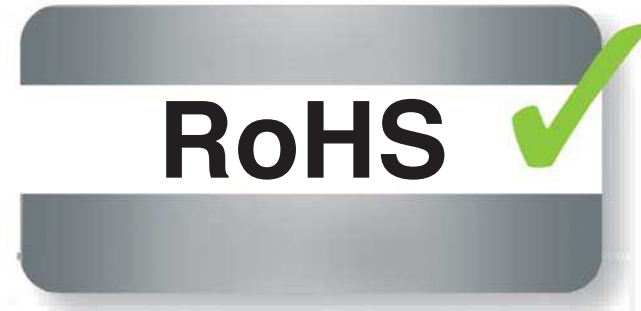

29.04.2017 – Subject to technical modification

Part-No. 198064.1000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk