

# Technical data sheet -

## Signal cable assemblies for C-tracks

<b>Identification</b>	Type	6FX8002-2EQ00-1BA0
	Part-No.	198270.1000

### Use/Application/Characteristics

Application	<ul style="list-style-type: none"><li>• Resolver cable</li><li>• Due to full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely rough operating conditions, aggressive coolants and lubricants</li></ul>
Characteristics	<ul style="list-style-type: none"><li>• Silicone free</li><li>• RoHS-compliant</li></ul>

### Technical data

Number of strands/cross-section	(2×0.5+4×0.23+3×(2×0.14)+4×0.14)	
OD Ø	9.5 ca. mm	
UL approval	cURus	
Nominal voltage	30 V 80 °C	
Rated voltage	300 V	
Test voltage	500 V	
Insulation resistance	min. 2000 MΩ × km	
Temperature range	moving	-25 °C to +80 °C
	fixed	-40 °C to +80 °C
Minimum bending radius	moving	D × 12
	fixed	D × 6
Burning behavior	Flame-retardant according to VDE 0482 T 265-2, DIN EN 50265/2, IEC 60332-1, UL 1581 section 1080 VW-1 CSA FT 1	
Halogen free	according to DIN EN 50267-2-1	
Product photo	The product photos are not to scale and do not represent detailed images of the respective products.	

### Construction

Strand color	Strand color Conductors color-coded for specific system
Conductor structure	Bare copper wire, finely stranded according to DIN VDE 0295 class 6, IEC 60228 class 6
Conductor insulation	Special TPE conductor insulation, UL qualified
Strand color	Conductors color-coded for specific system
Stranding	Conductors cabled in layers without mechanical stress, layer pitch optimised

17.02.2017 – Subject to technical modification

Part-No. 198270.1000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

## Technical data sheet -

---

Banding	Fleece wrap over cable core
Overall shield	Braid from tinned copper wire, optical coverage $\geq 85\%$
Jacket color	green RAL 6018

---

### General

---

Note \* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

#### Ordering instructions:

The LÜTZE Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design


4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

#### Special features:

- No minimum order quantity
  - All intermediate lengths in steps of 0.5 m are available within a short time
  - When ordering, please specify serial number and length key
  - Additional types on request
- 

### Symbols

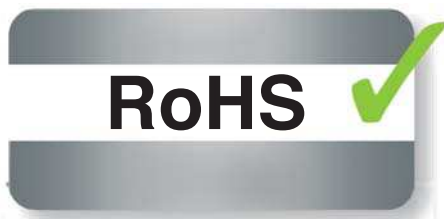

17.02.2017 – Subject to technical modification

Part-No. 198270.1000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY