


Technical data sheet · Acc. to SIEMENS-6FX8002 standard

Base cable

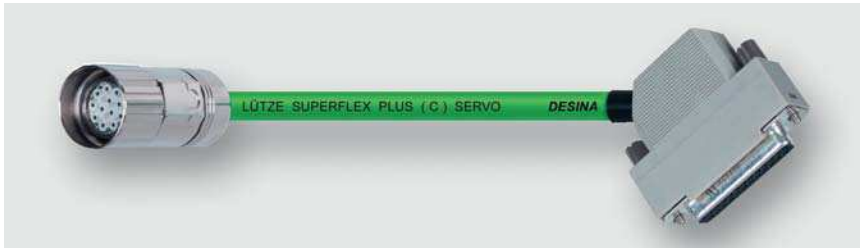

Signal cable assemblies for C-tracks

Identification	Type	6FX8002-2CA72-1BA0
	Part-No.	198290.1000

Use/Application/Characteristics		
Application	<ul style="list-style-type: none"> • Resolver cable • Due to full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely rough operating conditions, aggressive coolants and lubricants 	
Characteristics	<ul style="list-style-type: none"> • Silicone free • RoHS-compliant 	

Technical data		
Number of strands/cross-section	(4×2×0.38+4×0.5)	
OD Ø	9.0 ca. mm	
Length	10.0 m	
UL approval	cURus	
Nominal voltage	30 V 80 °C	
Rated voltage	300 V	
Test voltage	500 V	
Insulation resistance	min. 2000 MΩ × km	
Temperature range	moving	-25 °C to +80 °C
	fixed	-40 °C to +80 °C
Minimum bending radius	moving	D × 12
	fixed	D × 6

09.08.2016 – Subject to technical modification

Part-No. 198290.1000

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
 Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
 www.lutze.com · info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park
 Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
 www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · Acc. to SIEMENS-6FX8002 standard

Base cable

Burning behavior	Flame-retardant according to VDE 0482 T 265-2, DIN EN 50265/2, IEC 60332-1, UL 1581 section 1080 VW-1 CSA FT 1
Halogen free	according to DIN EN 50267-2-1
Product photo	The product photos are not to scale and do not represent detailed images of the respective products.

Construction

Strand color	Strand color Conductors color-coded for specific system
Conductor structure	Bare copper wire, finely stranded according to DIN VDE 0295 class 6, IEC 60228 class 6
Conductor insulation	Special TPE conductor insulation, UL qualified
Strand color	Conductors color-coded for specific system
Stranding	Conductors cabled in layers without mechanical stress, layer pitch optimised
Banding	Fleece wrap over cable core
Overall shield	Braid from tinned copper wire, optical coverage $\geq 85\%$
Jacket color	green RAL 6018

General

Note	* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only
------	---

Ordering instructions:

The LÜTZE Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design


4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Symbols

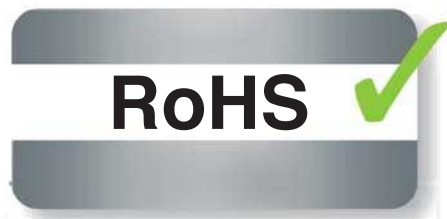

09.08.2016 – Subject to technical modification

Part-No. 198290.1000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · Acc. to SIEMENS-6FX8002 standard
Base cable



09.08.2016 – Subject to technical modification

Part-No. 198290.1000

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk