

M8 - connector



Identification	Type Part-No.	KUGK-M8 4POL. SNK 490126
Description	field wireable connector, M8 straight Male / female IDC quick-connect technology	
Technical data	Nominal voltage AC/DC 24 V Nominal voltage range max. 30 V Pol number 4	
General	Form M8 × 1, female Test voltage 0.8 kV Pollution degree 3 Insulation resistance $\geq 100 \text{ M}\Omega$ Contact resistance $\leq 5 \text{ m}\Omega$ Class of flammability according to UL 94 V0 Protection class IP 67, in screwed condition Housing material PA 6 black Contact material CuSn, gold-plated	

30.01.2017 – Subject to technical modification

Part-No. 490126

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk


Technical data sheet - Actuator sensor interface

Thread material	CuSn nickel plated
Sealing ring	NBR
Conductor insulation	PVC / PE / PP
Cable diameter	2.5 – 5 mm
Storage temperature range	-40 °C ... 90 °C
Temperature range connector	-40 °C – 80 °C
Mechanical service life	10× connection of cables with the same gauge
Weight (kg/piece)	0.007
Termination	IDC 0.25 – 0.5 mm ² , AWG 22/24, class 2– 6
Standards	IEC 61076-2-104
PU	1

Mounting diagram

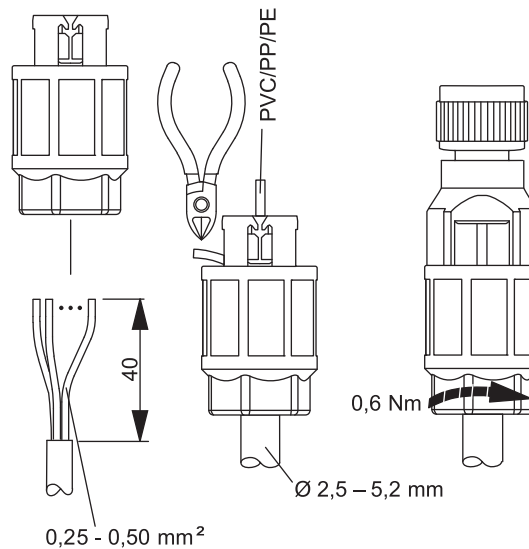

Pin layout



Accessories	Article number	Type	Outer jacket
matching cables	117240	3×0.25	PUR
	117241	4×0.25	PUR
	117243	3×0.34	PUR
	117244	4×0.34	PUR

30.01.2017 – Subject to technical modification

Part-No. 490126

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY