



<b>Identification</b>	Type	L-V24-5805 AC/DC 0-230V
	Part-No.	705805

<b>Technical data</b>	
Function type	Suppressors for valves
Protection device	without circuit
Nominal voltage	AC/DC 0–230 V
Rated frequency	50–60 Hz
Connecting lead	∅ 3 – 5.5 mm

<b>General</b>	
Form	CI, Contact clearance 9.4 mm
Status indication LED	LED yellow
Housing material	PA black UL94-V0
Protection class	IP 67
Field installation	Breakaway torque 0.4 Nm
Termination	Screw terminal max. 18 AWG / 1.5 mm <sup>2</sup>
Seal	NBR
Operation temperature range	-40 °C – 60 °C
Dimensions (w x h x d)	15.6 x 27.8 x 34.0 mm
Weight (kg/piece)	0.011
Standards	EN 175301-803 (DIN 43 650)
Approvals	UL recognized

29.01.2017 – Subject to technical modification

Part-No. 705805

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Dimensions

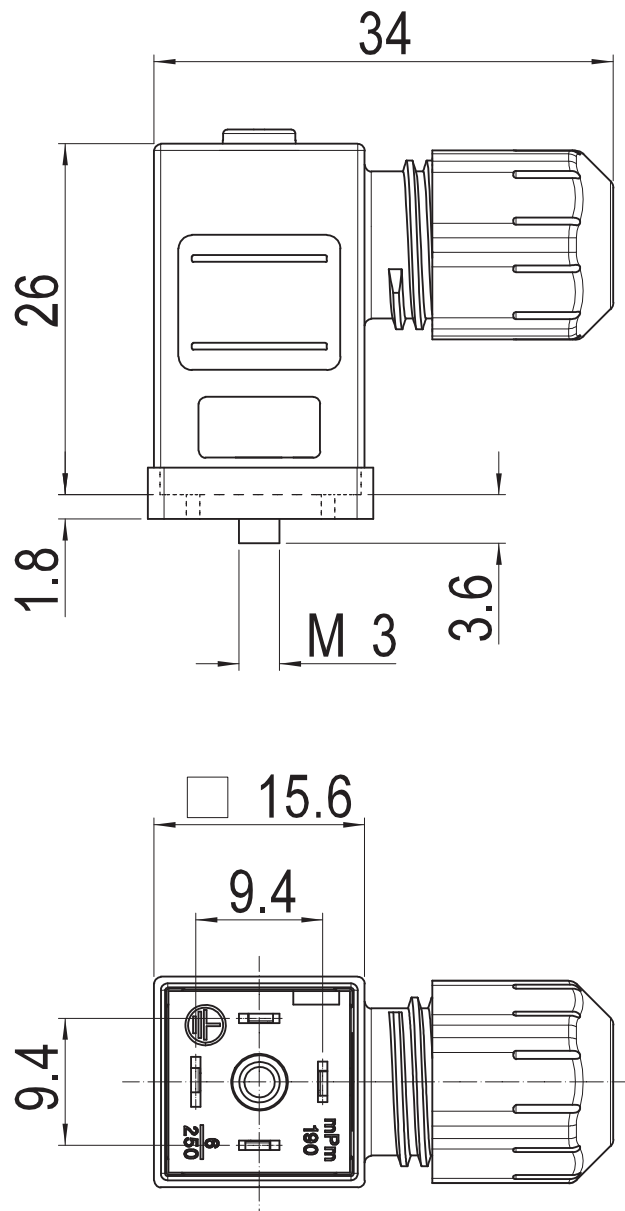

29.01.2017 – Subject to technical modification

Part-No. 705805

USA: LUTZE INC.


13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk

**PIN assignment**

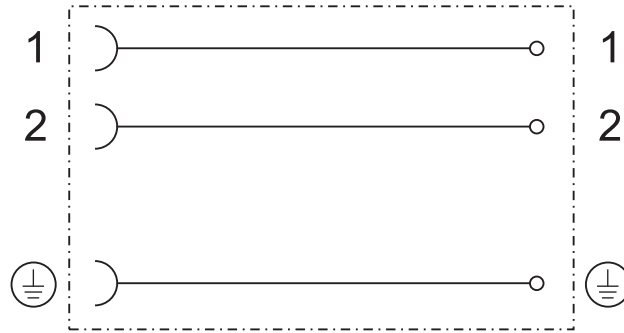

29.01.2017 – Subject to technical modification

Part-No. 705805

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY