



Identification	Type	LPG-V10-7514 AC/DC 0-230V
	Part-No.	707514

Technical data

Function type	Valve suppressors with two cable entry points
Protection device	without
Nominal voltage	AC/DC 0–230 V
Nominal voltage range	0 V – 230 V
Control voltage	± 10 %
Switching current	≤ 4 A
Rated frequency	50–60 Hz
Connecting lead	∅ 5–9 mm
Fittings	PG 9

General

Form	Construction A, contact clearance 18 mm
Housing material	PA black / transparent
Protection class	IP 65
Field installation	Breakaway torque 0.4 Nm
Termination	Screw terminal: 0.5–1.5 mm ²
Operation temperature range	-25...+60 °C
Storage temperature range	-25 °C ... 80 °C
Dimensions (w × h × d)	28.0 × 50.0 × 63.0 mm

29.01.2017 – Subject to technical modification

Part-No. 707514

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

Technical data sheet • Suppression Technology


Weight (kg/piece)
Standards

0.030
EN 175301-803 (DIN 43 650), ISO 4400


Dimensions

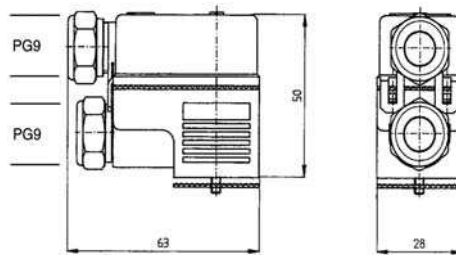

PIN assignment



Mounting diagram

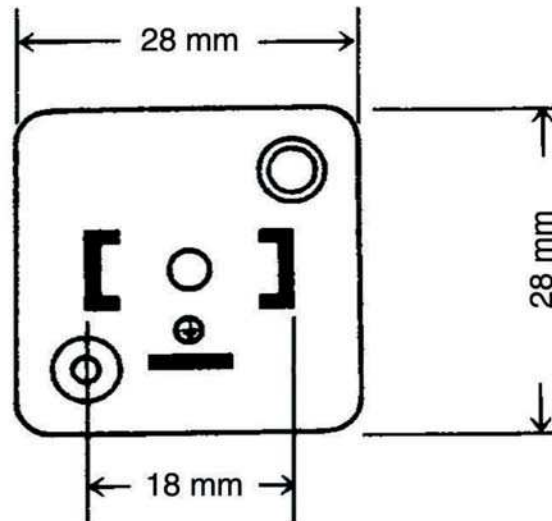

Accessories

Accessories	Color	Article number	Type	PU
Tag holder 9×20 mm	white	681315	BZT-0920	100

29.01.2017 – Subject to technical modification

Part-No. 707514

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY