



Identification	Type	L-A 2,5 m FLRY 0° AC/DC 0-230 V
	Part-No.	709427.0250

Technical data	
Function type	Suppressors for valves
Nominal voltage	AC/DC 0–230 V
Rated frequency	50–60 Hz
Holding capacitance	≤100 VA
Type of connecting lead	Single wire FLRY black, blue, brown 0.75 mm ²
Length of connecting lead (M)	2.5 M
Connecting lead	∅ 1.8 mm

General	
Form	Design A, contact clearance 18 mm
Coil Current max.	≤7 A
Conductor marking	black, blue
Housing material	TPU black
Contact material	CuSn, silver-plated
Befestigung	Fixing screw stainless steel 1.4567
Protection class	IP 65
Field installation	Breakaway torque 0.4 Nm
Operation temperature range	Plug: -25 °C – 90 °C Cable: -40 °C – 105 °C
Storage temperature range	-40 °C ... 90 °C

29.01.2017 – Subject to technical modification

Part-No. 709427.0250

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

Technical data sheet • Suppression Technology

Dimensions (w × h × d)	28.0 × 26.5 × 48.0 mm
Weight (kg/piece)	0.110
Standards	EN 175301-803 (DIN 43 650), ISO 4400

Dimensions

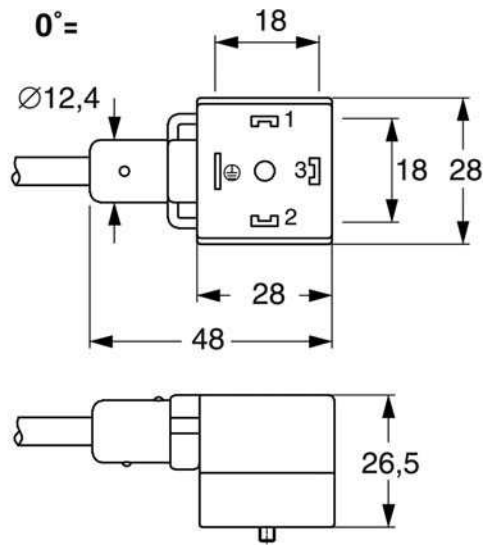

PIN assignment

1	BK
2	BU
3	BN

Comments

¹⁾ Excellent chemical and oil resistance. The material resistance must be checked based on the application for use with aggressive media!

29.01.2017 – Subject to technical modification

Part-No. 709427.0250

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY