



<b>Identification</b>	Type	L-A 10m FLRY 0° AC/DC 0-230 V
	Part-No.	709427.2000

<b>Technical data</b>	
Function type	Suppressors for valves
Nominal voltage	AC/DC 0–230 V
Rated frequency	50–60 Hz
Holding capacitance	≤100 VA
Type of connecting lead	Single wire FLRY black, blue, brown 0.75 mm <sup>2</sup>
Length of connecting lead (M)	20 M
Connecting lead	∅ 1.8 mm

<b>General</b>	
Form	Design A, contact clearance 18 mm
Coil Current max.	≤7 A
Conductor marking	black, blue
Housing material	TPU black
Contact material	CuSn, silver-plated
Befestigung	Fixing screw stainless steel 1.4567
Protection class	IP 65
Field installation	Breakaway torque 0.4 Nm
Operation temperature range	Plug: -25 °C – 90 °C Cable: -40 °C – 105 °C
Storage temperature range	-40 °C ... 90 °C

29.01.2017 – Subject to technical modification

Part-No. 709427.2000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

# Technical data sheet • Suppression Technology

Dimensions (w × h × d)	28.0 × 26.5 × 48.0 mm
Weight (kg/piece)	0.530
Standards	EN 175301-803 (DIN 43 650), ISO 4400

## Dimensions

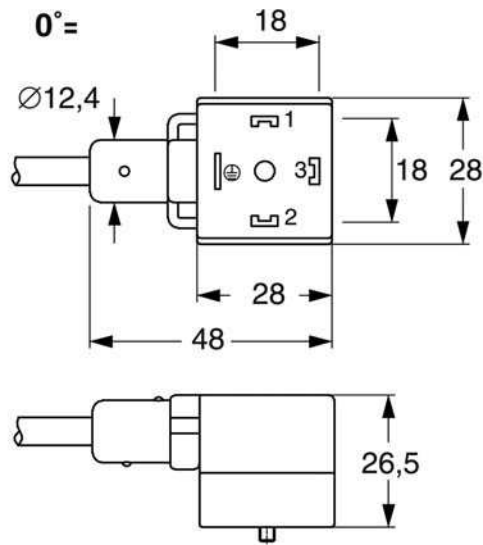

## PIN assignment

1	BK
2	BU
3	BN

## Comments

<sup>1)</sup> Excellent chemical and oil resistance. The material resistance must be checked based on the application for use with aggressive media!

29.01.2017 – Subject to technical modification

Part-No. 709427.2000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY