



Identification	Type	UBE-D-1756
	Part-No.	711756
Technical data		
Nominal voltage	DC 24 V	
General		
Housing material	PPE	
Protection class	IP 20	
Field installation	rail TS 35 (EN50022)	
Operation temperature range	0 °C – 70 °C	
Storage temperature range	-20 °C – 80 °C	
Dimensions (w x h x d)	248.0x78.0x62.0 mm	
Weight (kg/piece)	1.100	
Termination	32x 3-way screw terminal: 0,5 - 2,5 mm ²	

20.04.2013 – Subject to technical modification

Part-No. 711756

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Dimensions

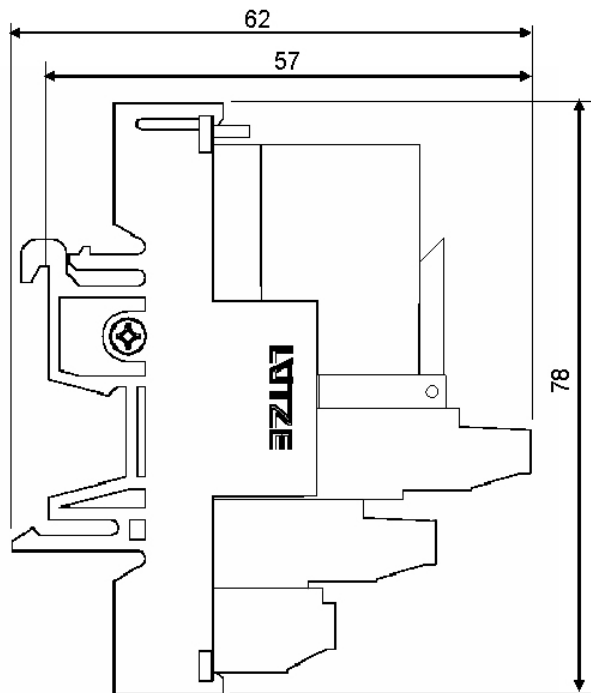

20.04.2013 – Subject to technical modification

Part-No. 711756


USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk

Dimensions

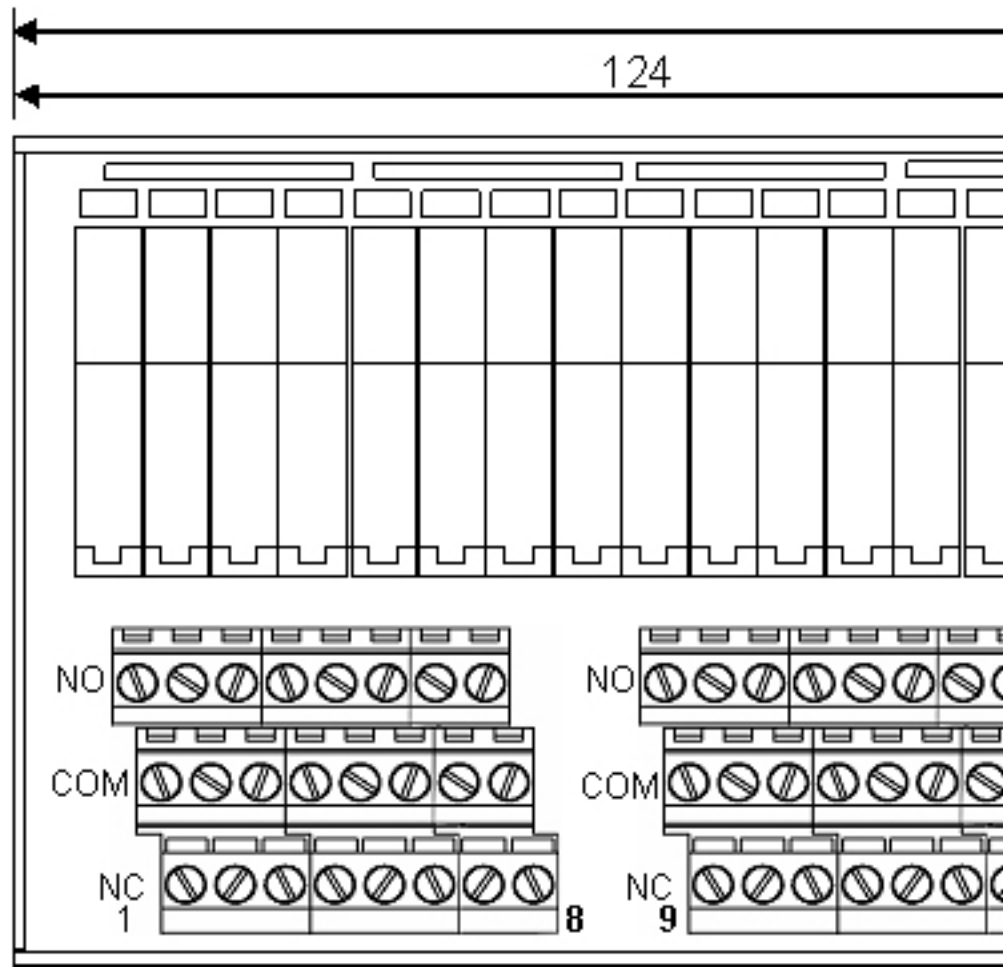

Comments

Accessories

Cable assemblies suitable for direct connection to most standard PLC systems (e.g. Allen Bradley, Siemens, Mitsubishi) are available in any cable length. Please contact the Lutze Sales Office to discuss your requirements.

20.04.2013 – Subject to technical modification

Part-No. 711756

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY