



Identification	Type Part-No.	LOCC-Box-GW 7-6459 716459
Description	Gateway for LOCC-Box-Net versions Input: LOCCbus (LIN) Output: USB, RS 232, CANopen	
Input	Operation voltage range DC 10–26.4 V Reverse voltage protection Yes Bus system LOCCbus, basic LIN Access method Single-Master - Multiple Slave Bus technology Line Physical level 1-wire Participants 40, max. 254 Bus length Max. 40 m Transfer rate 9600 Baud Data rate 8 Bit + fixed parity Transfer protocol Modified multi-drop	
Output	Bus system USB 2.0 Full-Speed, RS232, CANopen	

25.08.2017 – Subject to technical modification

Part-No. 716459

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk




Technical data sheet · Load monitoring

Dimensions

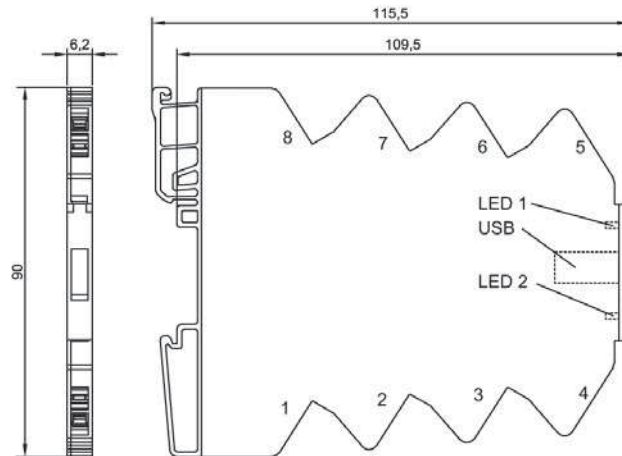

PIN assignment

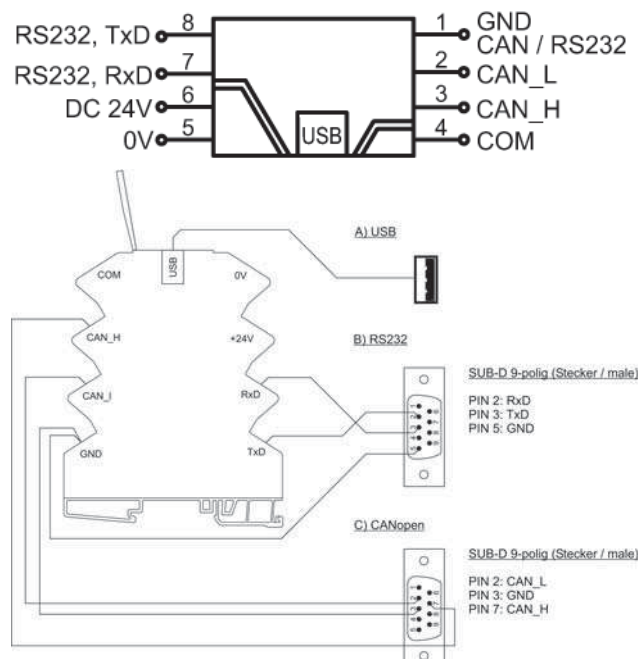

Accessories

Accessories	Color	Part-No.	Type	PU
Labelling sign 4x11 mm	white	681313	BZT-0411	100
Insulation plate		760809	TP 7-0809 MIC/SNR	10
Laser label A4 not punched		681031	LEB A4 PW	1

25.08.2017 – Subject to technical modification

Part-No. 716459

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
 Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
 www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
 Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
 www.lutze.com · sales.gb@lutze.co.uk