

regulated, 2400 W



Identification	Type	CPSB3-2400-48
	Part-No.	722816

Description	Primary switchmode power supply, PFC, 3-phase Input: Wide range input AC 340 - 550 V Output: DC 24 V, 100 A / DC 48 V, 50 A
--------------------	---

25.08.2017 – Subject to technical modification

Part-No. 722816

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · Power supply

Input

Input protection	Surge protection according to VDE 0160, over/undervoltage (auto restart) Phase monitoring (reduced output power): PFC error
Number of phases	3
Rated voltage U_N	3 × AC 400–500 V
Operation voltage range	AC 340–550 V / DC 520–750 V
Line frequency	47 – 63 Hz
Rated current I_N	4.5 A @ AC 400 V / 3.5 A @ AC 500 V
Inrush current	< 10 A (active inrush current limitation)
External fuse	Mini-circuit breaker: 3 × C 10 A (required)
Power Factor Correction P.F.C.	>0.92

Output

Rated voltage U_N	DC 48.00 V
Rated current I_N	50.00 A
Max. output current	>75 A, 5 s @ $U_{out} > 90 \%$
Short-circuit current	75 A, 5 s
Heat dissipation	<200 W
Setting range $U_{out \text{ min.}}/U_{out \text{ max.}}$	DC 23–56 V
Load regulation	<1 %
Rise time	< 4.5 S
Ripple and Noise	<200 mV pp
Hold up time	>10 ms @ AC 400 V / >10 ms @ AC 500 V
Status indication DC ON LED green	alphanumeric display
Status indication DC LOW LED red	alphanumeric display
Parallel / redundant mode	max. 4 devices
Efficiency	>92 %
Over voltage protection	>30 V
Short circuit	Hiccup Mode / current limit / constant current

Monitoring

DC ON Control (Rdy)	Relay, N/O contact active, adjustable, DCok: 90–110 % U_{set} , ACok: acc. input voltage range, overload Overtemperature range, charging complete
Switching capacity	AC/DC 30 V, 1 A, 30 W
Isolation voltage	AC 500 V
Output current	galvanically isolated: 0–10 V and 4–20 mA

General

Insulation voltage input / output	DC 4.2 kV
Insulation voltage input / ground	DC 2.2 kV
Insulation voltage output / ground	DC 750 V

25.08.2017 – Subject to technical modification

Part-No. 722816

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223

www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2

www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · Power supply

Derating	>45 °C: -40 W/°C
Operation temperature range	-20 °C ... +60 °C (Derating)
Storage temperature range	-25 °C ... +85 °C
MTBF	>500000 h: SN29500 / >150000 h: MIL HDBK 217F
Cooling	Air convection, forced cooling >45°C, 80 mm distance top/bottom, 10 mm side
Housing material	Aluminum
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	vertical
Shock resistance	30g
Vibration resistance	5 – 17.8 Hz: ±1.6 mm, 17.8 – 500 Hz: 2 g 2 hours/axes X,Y,Z, IEC 60068-2-6: 2007
Protection class	IP20 (IEC 529, EN 60529)
Protection class	I
Over voltage category	III
Degree of pollution	2
Weight	2.800 kg/piece
Connection device	Screw terminal Input 0.20 mm ² – 4.0 mm ² Output 0.20 mm ² – 35.0 mm ² Auxiliary 0.20 mm ² – 1.5 mm ²
Dimensions (w × h × d)	233.0 × 158.0 × 102.0 mm
Approvals	cULus (E249179)
Standards	UL 508 IEC 950 EN 60950 EN 55011 EN 61000-4-5 Surge immunity level IV VDE 0160 EN 61000-4-2/3/4/5/6/11
PU	1 piece

Interface

User Interface	LCD display 16 × 2 character, multi language, 4 keys (command and navigation)
Auxiliary voltage output	galvanically isolated DC 12 V, 100 mA
NTC	Temperature-controlled battery charging (mandatory)

25.08.2017 – Subject to technical modification

Part-No. 722816

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Range of functions

The new power compact series provides a number of additional adjustment options via function keys. The selected functions are shown on a display. In addition, the current output voltage and current are displayed for normal operation.

Input protection

- Active Surge suppressor and inrush limiter (ASSIL) as protection against overvoltages according to VDE 0160
- PFC error monitoring
- Phase monitoring with automatic reduction of the output power
- Automatic start/restart system for over- and undervoltages

Output protection

- Adjustable current limiting between $0.1 I_N$ and I_N
- Hiccup autoreset based on current limiting or maximum output voltage (150 %)

Status display and signal

- In addition to an LED for "DC OK" and error displays, the devices have the following analog outputs 0–10 V and 4–20 mA as direct function of the load current
- Programmable relay contact with the functions
 - Output voltage/current,
 - Overload,
 - Overtemperature

Additional functions

- Temperature-compensated battery charging function
- Display and compensation of the voltage drop for long cables
- Remote On/Off of the output voltage
- DC 12 V auxiliary voltage
- Monitoring and control interface based on RS232 (optional)
- Integrated O-ring diode
- Load sharing in parallel operation
- Load current sharing

25.08.2017 – Subject to technical modification

Part-No. 722816

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223

www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2


www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · Power supply

Dimensions

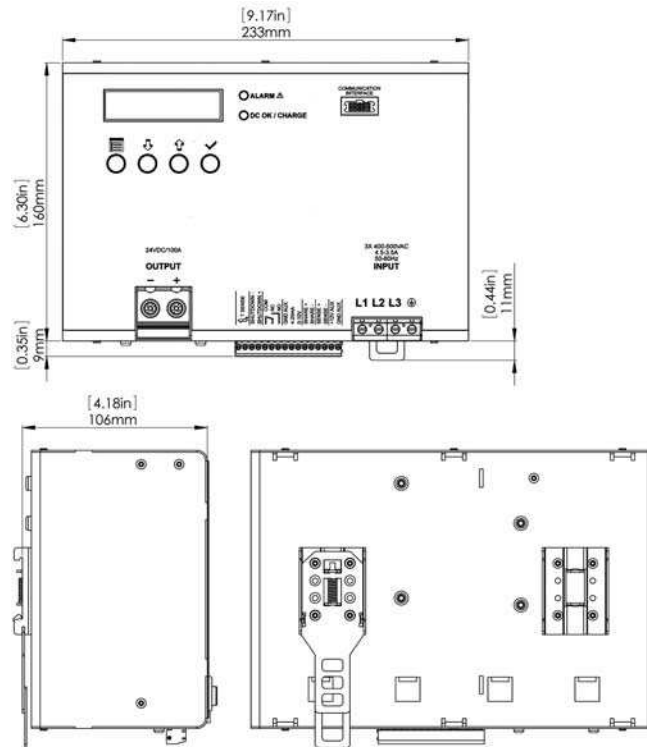

25.08.2017 – Subject to technical modification

Part-No. 722816

USA: LUTZE INC.


13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.


Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Technical data sheet · Power supply

PIN assignment

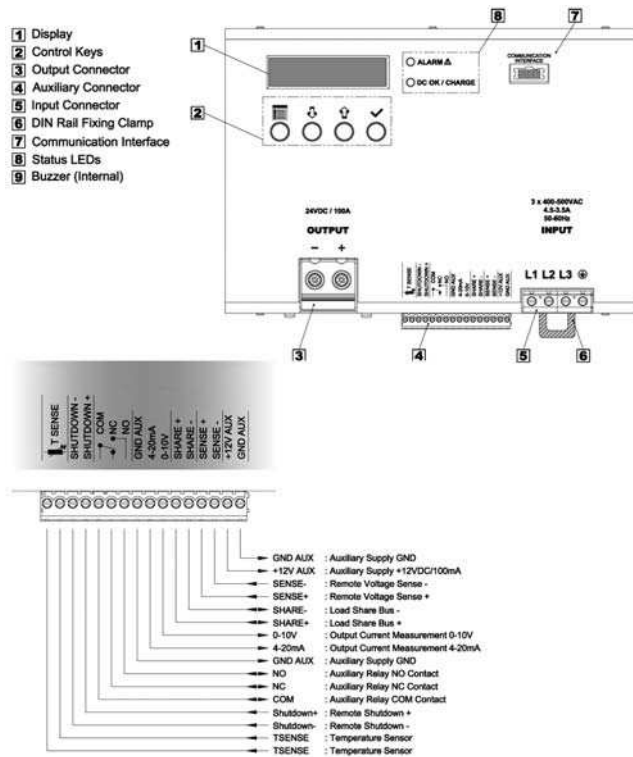

Serial operation

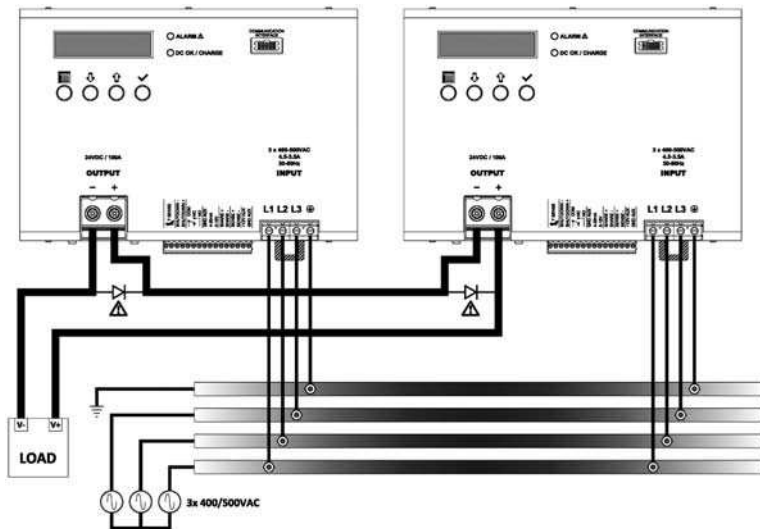

25.08.2017 – Subject to technical modification

Part-No. 722816

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223

www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2


www.lutze.com · sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

Technical data sheet · Power supply


Parallel/redundant mode

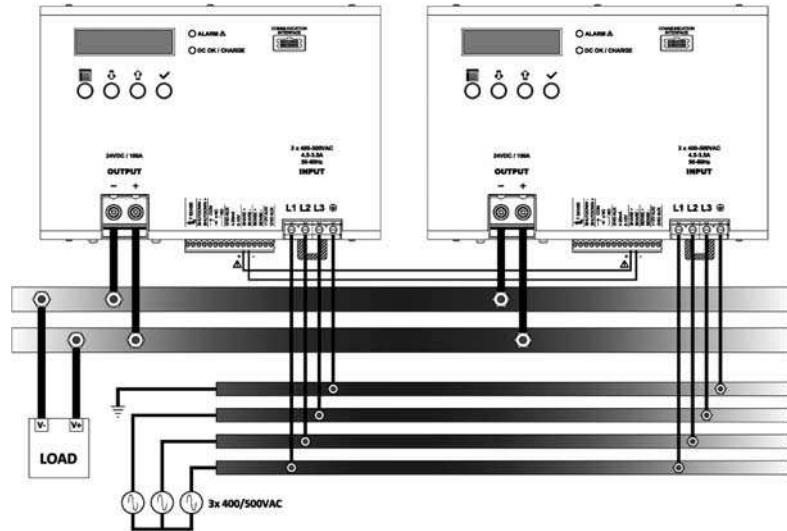


Charging operation



Output voltage in 0–10 V

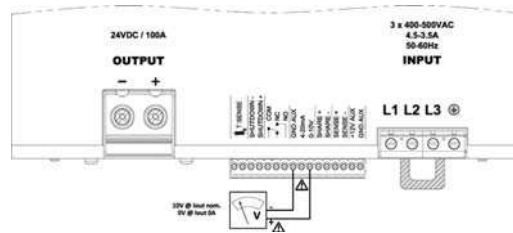

Output voltage in 4–20 mA

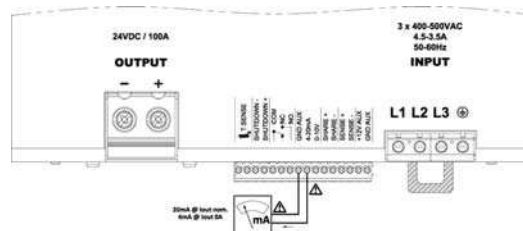

25.08.2017 – Subject to technical modification

Part-No. 722816

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY