



Identification	Type	CNBP30
	Part-No.	723115
Description		
	Battery housing for holding two lead batteries 12 V / 1.2 Ah	
Energy storage		
Memory type	2× lead batteries DC 12 V / 1.2 Ah	
max. charging current	600 mA @ DC 12 V, 300 mA @ DC 24 V	
Fuse for memory medium	15 A, automatic resetting	
Output		
Max. output current	5 A @ DC 2 V, 3 A @ DC 24 V	
General		
Insulation voltage input / ground	0.5 kV, 1 min.	
Operation temperature range	-20 °C ... +40 °C	
Storage temperature range	-20 °C ... +40 °C	
Relative air humidity	95 % not condensing	
Cooling	free convection	
Housing material	Aluminum	
Mounting	DIN rail mountable TS35 (EN 60715)	
Installation position	vertical, with 20 mm distance to other devices	

25.08.2017 – Subject to technical modification

Part-No. 723115

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.


Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk

Technical data sheet - DC UPS Battery Management System

Protection class	IP20 (EN 60529)
Over voltage category	II
Degree of pollution	2 (IEC 664-1)
Configured weight max.	1.200 kg/piece
Connection device	Connector with screws: 2.5 mm ² (AWG 24-12)
Dimensions (w × h × d)	54.0 × 115.0 × 110.0 mm
PU	1 piece

Comments	Suitable for DC12V and DC24V applications Integrated self-healing fuse
-----------------	---

Dimensions

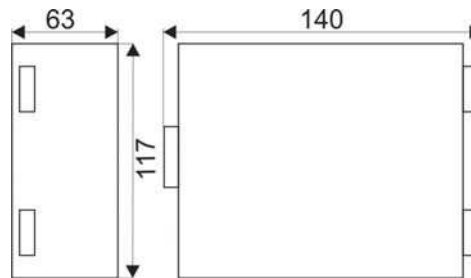

25.08.2017 – Subject to technical modification

Part-No. 723115

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY