



<b>Identification</b>	Type	LRZK 4S-D024-110H
	Part-No.	730854
<b>Input</b>		
Input voltage range	16.8 V – 30.0 V	
Nominal voltage	DC 24 V	
Rated current	59.0 mA	
Interrupting voltage	<2.4 V	
Protection device	Bridge rectifier	
Rated insulation voltage (EN 50178)	50 V	
Status Indication	LED yellow	
<b>Load Side</b>		
Contact type	1 NC/1 NO contact, positively driven in acc. with EN 50205, application type A	
Min. switching voltage	AC/DC 5 V	
Max. switching voltage	AC/DC 250 V	
Min. switching current	AC/DC 5 A	
Max. switching current	AC/DC 8 A	
Switching capacity AC 15	230 V: 3 A A	
Switching capacity DC 13	24 V: 5 A, 0.1 Hz, 110 V: 0.3 A	
Max. switching capacity	1250 VA	
Contact material	AgSnO <sub>2</sub> + 0.2 µm HV	
Mechanical service life	2 x 10 <sup>7</sup> operations	

02.04.2016 – Subject to technical modification

Part-No. 730854

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
 www.lutze.com • info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park  
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
 www.lutze.com • sales.gb@lutze.co.uk




## Technical data sheet • Interface Technology

Inrush current	20 A (20 ms)
Switch-on delay	10 ms
Switch-off delay	10 ms
Clearance/creep. dist. (control/load side)	>3.2 mm
Rated insulation voltage (EN 50178)	250 V


### General

Housing material	PPE
Protection class	IP 20
Field installation	rail TS 35 (EN 50022)
Insulation voltage input/output	4.0 kV <sub>eff</sub>
Insulation resistance	≥100 MΩ
Safe isolation	yes
Operation temperature range	-25 °C – 60 °C
Storage temperature range	-40 °C – 80 °C
Dimensions (w × h × d)	22.5 × 60.0 × 67.0 mm
Weight (kg/piece)	0.053
Approvals	cULus
Termination	Screw terminal: 0.08–2.5 mm <sup>2</sup>

### Dimensions

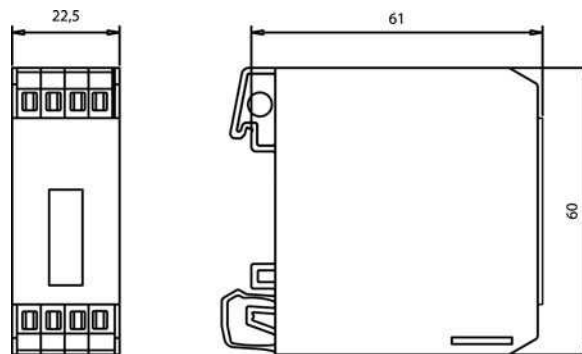

### PIN assignment

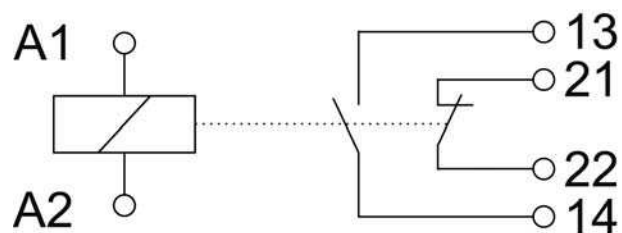

02.04.2016 – Subject to technical modification

Part-No. 730854

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LUTZE Ltd.


Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

# Technical data sheet · Interface Technology

## Limit curve

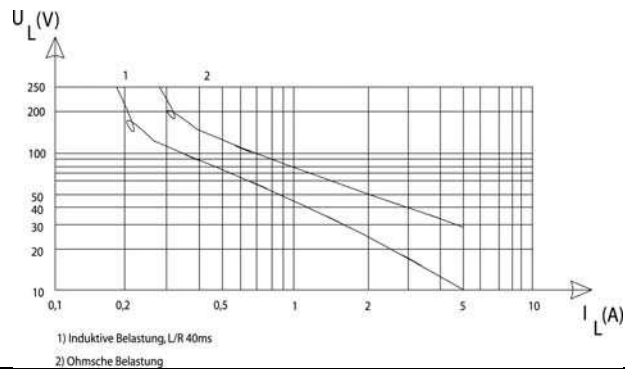

## Accessories

Accessories	Color	Article number	Type	PU
Jumper comb 24pole, 26A	blue	760801	BK 6-0801	5
Tag holder 7×20 mm	white	760968	BZT-0720	100
Labels for laser printer 9 x 20 mm (Sheet with 270 labels)		681032	LEB-0924	1

02.04.2016 – Subject to technical modification

Part-No. 730854

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223  
www.lutze.com · info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2  
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY