



Identification	Type	DIOHUB USB 3/3
	Part-No.	745584

Technical data	
Nominal voltage	DC 24 V
Nominal voltage range	DC: 19 - 72
Rated current	Nom. 80 mA, max. 200 mA
Ripple	Max. 10 %
Status Indication	Port status per USB, yellow LED, off: off / on: ready Group 1 operating voltage, green LED Group 2 operating voltage, yellow LED
Galvanic isolation I/O	Group 1 to Group 2
Max. current per downstream	500 mA
USB standard	1.1
USB compatibility	2.0
Form	Downstream: USB-A, upstream: USB-B
Properties	Group 1: USB upstream connection, 3 USB downstream ports Group 2: 3 USB downstream ports

General	
Insulation	500 V _{eff}
Class of flammability according to UL 94	V0
Protection class	IP 20
Operation temperature range	0 °C – 60 °C

20.04.2013 – Subject to technical modification

Part-No. 745584

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk





SYSTEMATIC TECHNOLOGY

Technical data sheet - DIOHUB USB 3/3

Storage temperature range	-40 °C – 85 °C
Dimensions (w × h × d)	48.5×101.0×121.0 mm
Weight (kg/piece)	0.258
Housing material	Italblend
Field installation	Snaps on to TS 35 rail (EN 50022)
Installation position	Any
Termination	Spring terminal: 0.25–2.5 mm ²

PIN assignment

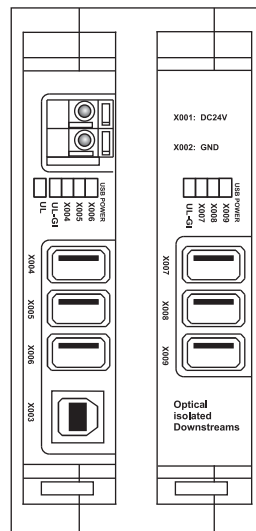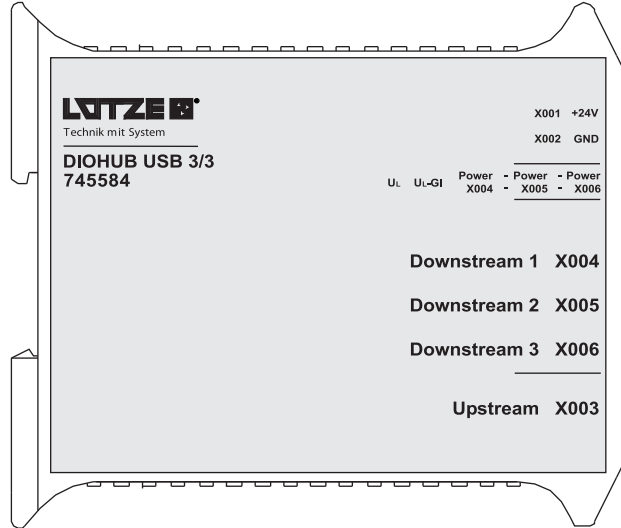

20.04.2013 – Subject to technical modification

Part-No. 745584

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY