



<b>Identification</b>	Type	WPT 7-0811
	Part-No.	750811
<b>Input</b>		
Measurement input	2-wire, Offset correction	
Galvanic isolation I/O	3-way isolation	
Temperature range	-50–150°C / 0–200°C / 0–400°C, adjustable via DIP switch S1	
Transmission frequency	10 Hz	
Input resistance	240 kΩ	
Sensor current	0.5 mA	
Zero /Span	Production comparison	
<b>Load Side</b>		
Output signal	0–50 Hz / 0–100 Hz / 0–1000 Hz / 0–10.000 Hz - adjustable via DIP switch S1	
Max. load impedance at U-output	≥2500 Ω, output level approx. 10 V	
Load impedance	55 Ω	
Output current	21 mA	
Ripple	<5 mV <sub>eff</sub>	
<b>General</b>		
Nominal voltage	AC/DC 24 V	
Operation voltage range	DC: 16.8–30 V; AC: 19.2–28.8 V	
Rated current	13.0 mA	

20.04.2013 – Subject to technical modification

Part-No. 750811

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA  
 Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223  
 www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.


Unit 3, Sandy Hill Park  
 Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU  
 Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2  
 www.lutze.com · sales.gb@lutze.co.uk



## Technical data sheet - Interface Technology

Status Indication	LED yellow
Input/output protection	Overvoltage AC/DC 30 V, Output short circuit-proof
Accuracy	0.3 % FSR
Linearity error	0.1 % FSR
Rise time (10 - 90%)	frequency-dependent
Transmission frequency	<30 Hz
Temperature coefficient	150 ppm / K FSR
Insulation voltage input/output	1.5 kV <sub>eff</sub>
Housing material	PPE
Field installation	rail TS 35 (EN 50022)
Protection class	IP 20
Installation position	Optional
Termination	Screw terminal: 0.14–1.5 mm <sup>2</sup>
Operation temperature range	-25 °C – 60 °C
Storage temperature range	-40 °C – 85 °C
Dimensions (w × h × d)	6.2×90.0×92.5 mm
Weight (kg/piece)	0.040 kg/piece
Approvals	cULus
Standards	EN 60721-3-3; EN 55011; EN 61000-4-2/6; EN 50178, contamination level 2, Over voltage category III
PU	1

### Dimensions

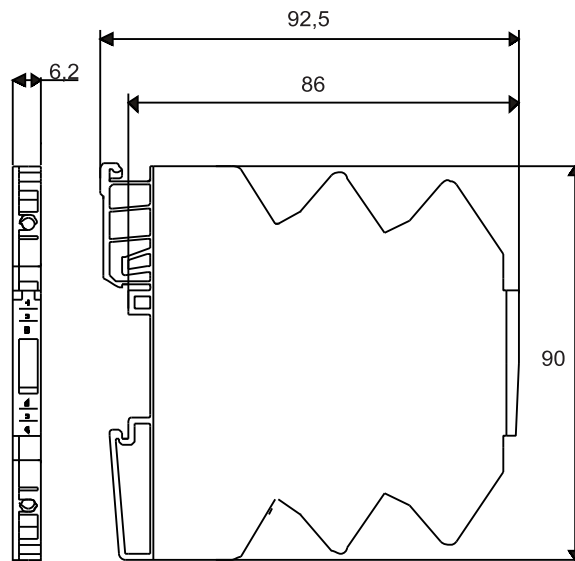

20.04.2013 – Subject to technical modification

Part-No. 750811

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

**PIN assignment**

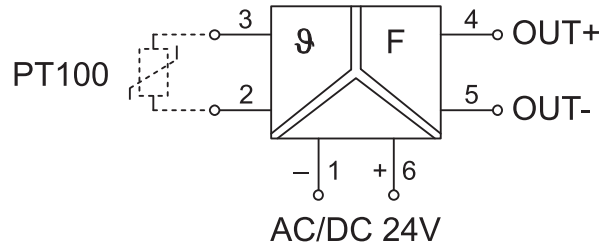

**Range adjustment**

● → Switch On		S1					
Range	Output	1	2	3	4	5	6
-50 - 150°C	0 - 50Hz						
-50 - 150°C	0 - 100Hz		●				
-50 - 150°C	0 - 1kHz			●			
-50 - 150°C	0 - 10kHz		●	●			
0 - 200°C	0 - 50Hz				●		
0 - 200°C	0 - 100Hz		●		●		
0 - 200°C	0 - 1kHz			●	●		
0 - 200°C	0 - 10kHz		●	●	●		
0 - 400°C	0 - 50Hz					●	
0 - 400°C	0 - 100Hz		●			●	
0 - 400°C	0 - 1kHz			●		●	
0 - 400°C	0 - 10kHz		●	●		●	

**Accessories**

Accessories	Colour	Article number	Type	PU
Tag holder 4×11 mm	white	681313	BZT-0411	100
Isolation plate		760809	TP 7-0809	5
Labels for laser printer 4.23 x 11 mm (Sheet with 1056 labels)		681034	LEB 0411	1

**Accessories**

Accessories	Colour	2-pole	3-pole	4-pole	8-pole	16-pole	PU
Jumper comb 6A	red	762802	762805	762812	762822	762832	10
Jumper comb 6A	white	762803	762806	762813	762823	762833	10
Jumper comb 6A	blue	762804	762807	762814	762824	762834	10

20.04.2013 – Subject to technical modification

Part-No. 750811

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223

www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2

www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY