



<b>Identification</b>	Type	WPT 6-1815
	Part-No.	751815

**Input**

Measurement input	PT100, 2/4-wire
Galvanic isolation I/O	3-way isolation
Temperature range	-50–50°C / -50–100°C / -50–150°C / 0–100°C / 0–150°C / 0–200°C / 0–300°C / 0–400°C - adjustable via rotary switch S1
Transmission frequency	10 Hz
Input resistance	240 kΩ
Sensor current	0.5 mA
Zero /Span	Production comparison

**Load Side**

	0/10 V	0–20 mA	4–20 mA
Max. load impedance at I-output		400 Ω	400 Ω
Max. load impedance at U-output	>1 kΩ		
Load impedance	55 Ω		
Output current		max. 21 mA	
Output signal		adjustable via DIP switch S2	
Ripple		<5 mV <sub>eff</sub>	

**General**

20.04.2013 – Subject to technical modification

Part-No. 751815

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA  
 Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223  
 www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
 Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU  
 Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2  
 www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

	<b>750815/751815</b>	<b>750818/751818</b>
Nominal voltage	AC/DC 24 V	AC/DC 24–240 V
Operation voltage range	DC: 16.8–30 V; AC: 19.2–28.8 V	DC: 16.8–264 V; AC: 19.2–264V
Termination	Screw-/spring terminal 0.14–2.5 mm <sup>2</sup>	Screw-/spring terminal 0.14–2.5 mm <sup>2</sup>
Nominal voltage	AC/DC 24 V	
Operation voltage range	DC: 16.8–30 V; AC: 19.2–28,8 V	
Rated current	10.0 mA	
Status Indication	LED yellow, blinks for wire break and output goes to a saturated state	
Input/output protection	Overvoltage AC/DC 30 V, Output short circuit-proof	
Accuracy	0.3 % FSR	
Linearity error	0.1 % FSR	
Rise time (10 - 90%)	30 ms	
Build-up time (Accuracy 1%)	60 ms	
Error coefficient of measuring line	0.1 K + 0.1 %/Ω	
Temperature coefficient	150 ppm / K FSR	
Insulation voltage input/output	4.0 kV <sub>eff</sub>	
Housing material	PPE	
Field installation	rail TS 35 (EN 50022)	
Protection class	IP 20	
Installation position	Optional	
Termination	Spring terminal 0.14–2.5 mm <sup>2</sup>	
Operation temperature range	-25 °C – 60 °C	
Storage temperature range	-40 °C – 85 °C	
Dimensions (w × h × d)	17.5×79.0×84.0 mm	
Weight (kg/piece)	0.070 kg/piece	
Approvals	cULus, Class I, Div. 2, Groups A, B, C, D T4A	
Standards	EN 60721-3-3, EN 55011, EN 61000-4-2/6, EN 50178, contamination level 2, Over voltage category III	
PU	1	

20.04.2013 – Subject to technical modification

Part-No. 751815

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU


Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

Dimensions

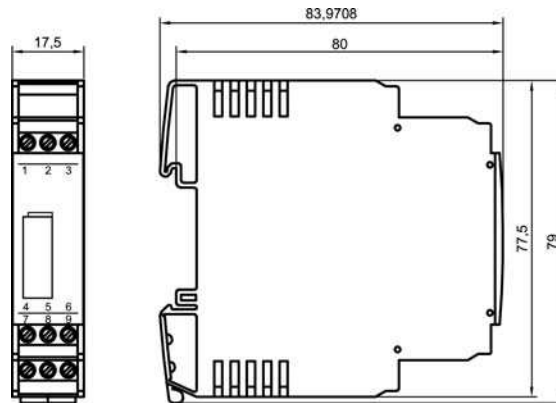

PIN assignment

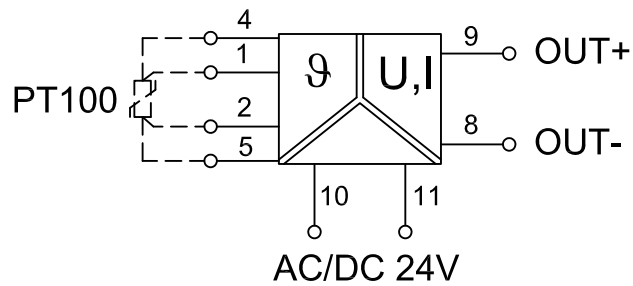

20.04.2013 – Subject to technical modification

Part-No. 751815

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk

**Range adjustment**

S1	
Range	Pos.
-50 – 50°C	0
-50 – 100°C	1
-50 – 150°C	2
0 – 100°C	3
0 – 150°C	4
0 – 200°C	5
0 – 300°C	6
0 – 400°C	7

● → Switch On	S2			
Output	1	2	3	4
0-10V	●			
0-20mA		●		
4-20mA			●	

**Accessories**

Accessories	Colour	Article number	Type	PU
Jumper comb 24pole, 26A	blue	760801	BK 6-0801	5
Tag holder 7×20 mm	white	760968	BZT-0720	100
Laser printer label 6.35×15.24 mm (sheet with 528 labels)		681033	LEB-0615	1

20.04.2013 – Subject to technical modification

Part-No. 751815

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223

www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2

www.lutze.com · sales.gb@lutze.co.uk