



Identification	Type	TP 7-0809 MIC/SNR
	Part-No.	760809

General	
Housing material	Luranyl KR 2456-3
Color	black, RAL 9001
Class of flammability according to UL 94	V0
Operation temperature range	-40 °C – 80 °C
Storage temperature range	-40 °C – 80 °C
Dimensions (w × h × d)	2.0 × 89.2 × 91.8 mm
Weight (kg/piece)	0.005
Termination	attachable to TS 35 (EN50022)

03.04.2016 – Subject to technical modification

Part-No. 760809


USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Dimensions

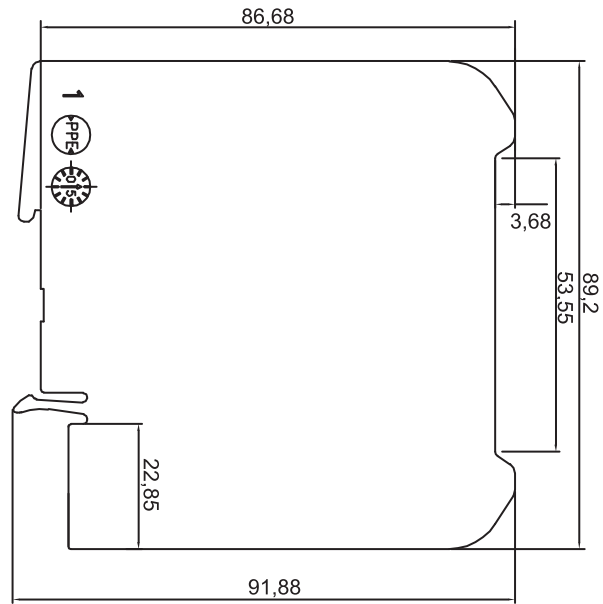

03.04.2016 – Subject to technical modification

Part-No. 760809

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY