



Identification	Type	OT 6-2056 DC 24V
	Part-No.	762056
Input		
Input voltage range	19.2 V – 30.0 V	
Rated current	18.0 mA	
Interrupting voltage	<12 V	
Protection device	Reverse voltage protection	
Status Indication	LED yellow	
Load Side		
Switching element	Triac, N/O contact	
Min. switching voltage	AC 18 V	
Max. switching voltage	AC 240 V	
Min. switching current	AC 5 mA	
Max. switching current	AC 1 A	
Switch-on delay	0.1 ms	
Switch-off delay	10 ms	
Switching frequency	<20 Hz	
General		
Housing material	PPE	
Protection class	IP 20	

03.04.2016 – Subject to technical modification

Part-No. 762056

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
 www.lutze.com • info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
 www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY


Technical data sheet · Interface Technology

Field installation	rail TS 35 (EN 50022)
Insulation voltage input/output	4.0 kV _{eff}
Clearance/creep. dist. (control/load side)	>5.5 mm
Safe isolation	yes
Operation temperature range	-25 °C – 70 °C
Storage temperature range	-40 °C – 80 °C
Dimensions (w × h × d)	6.2 × 78.0 × 86.0 mm
Weight (kg/piece)	0.029
Termination	Screw terminal: 0.25–2.5 mm ²

Dimensions

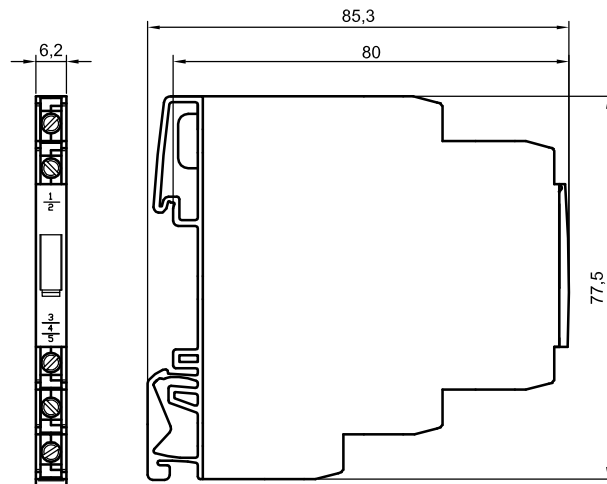

PIN assignment

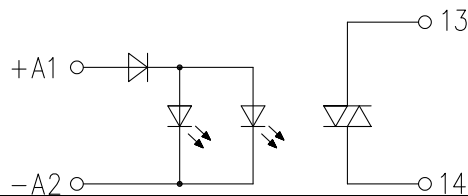

Accessories

Accessories	Color	Article number	Type	PU
Jumper comb 24-pin, 26 A	blue	760801	BK 6-0801	5
tag holder 4×11 mm	white	681313	BZT-0411	100

03.04.2016 – Subject to technical modification

Part-No. 762056

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY