

Relay



---

<b>Identification</b>	Type	SSR-DC24V/DC48V, 0,1A
	Part-No.	768011

**Input**

Nominal voltage	DC 24 V
Rated current	0.007 A
Power consumption	0.17 W
Interrupting voltage	10 V
Input characteristic impedance	4000 $\Omega$

**Output**

Min. switching voltage	DC 5 V
Max. switching voltage	DC 48 V
Min. switching current	1 mA
Max. switching current	100 mA
Switching capacity	4.5 W
Switching frequency	< 100Hz
Switch-on delay	5 ms
Switch-off delay	10 ms
Overvoltage category	III
Pollution degree	3

---

**General**

---

20.04.2013 – Subject to technical modification

Part-No. 768011

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.



Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY



Limit curve

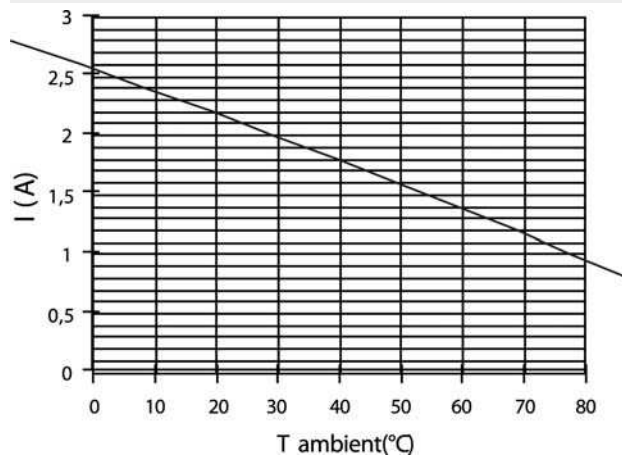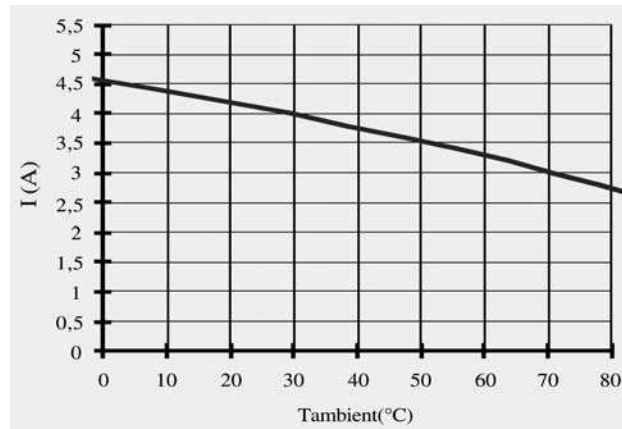

20.04.2013 – Subject to technical modification

Part-No. 768011

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY