


Relay

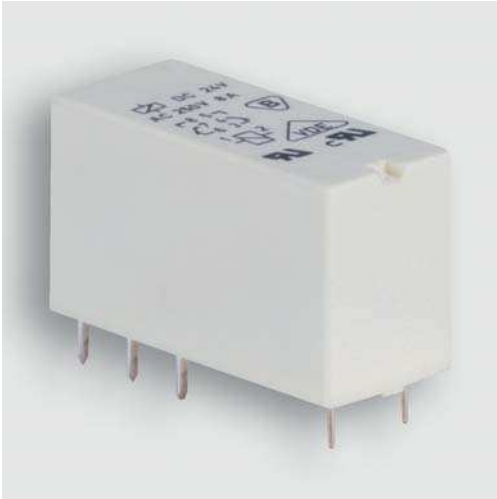

Identification	Type	RE1WHV-0121 DC24
	Part-No.	770121

Input

Nominal voltage	DC 24 V
Power consumption	DC: 0.4 W

Output

Min. switching voltage	AC/DC 5 V
Max. switching voltage	AC 400 V / DC 300 V
Min. switching current	AgNi+ 5µm HV: AC/DC 2 mA
Max. switching current	AC1: 16 A / 250 V AC, DC1: 16 A / 24 V DC
Switching capacity AC 15	3.3 A
Switching capacity DC 13	24 V: 2 A, 115 V: 300 mA, 230 V: 150 mA
Max. switching capacity	4000 VA
Switching frequency	AC1: 600 cycles/hour, without load 72,000 cycles/hour
Mechanical service life	>3 × 10 ⁷ operations
Switch-on delay	15 ms
Switch-off delay	8 ms
Clearance/creep. dist. (control/load side)	> 10 mm
Overvoltage category	III
Pollution degree	3

20.04.2013 – Subject to technical modification

Part-No. 770121

USA: LUTZE INC.
 13330 South Ridge Drive • Charlotte, NC 28273, USA
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
 www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.
 Unit 3, Sandy Hill Park
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
 www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

Technical data sheet - Interface Technology

General

Contact type	1 change over contact
Rated insulation voltage (EN 50178)	AC 400 V (C 250/ B 400)
Resistor	< 100 mΩ
Contact material	AgNi+5μm HV
Protection class	IP 40
Protection class	RTII - flux-tight
Shock resistance	10 g
Vibration resistance	10g, 10...150 Hz
Safe isolation	yes
Operation temperature range	-40 °C – 70 °C
Storage temperature range	-40 °C – 85 °C
Dimensions (w × h × d)	29.0×15.7×12.7 mm
Weight (kg/piece)	0.014
Approvals	UL, CSA, VDE
Termination	plug-in

Dimensions

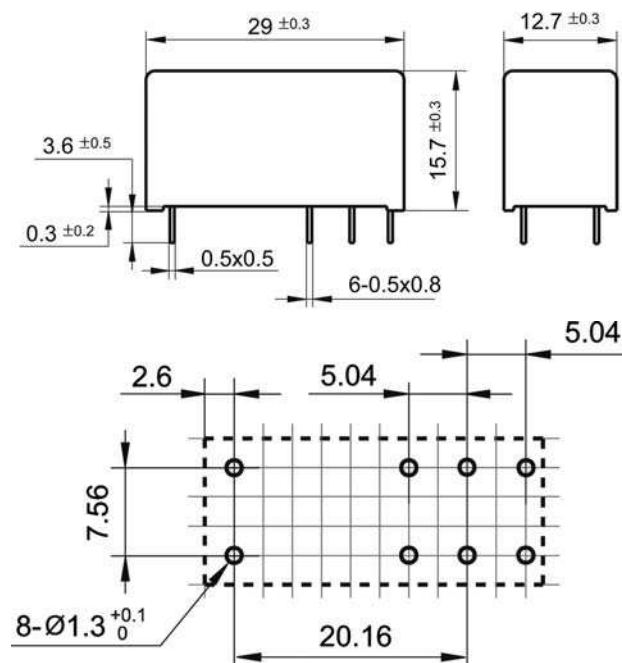

20.04.2013 – Subject to technical modification

Part-No. 770121

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU





Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Limit curve

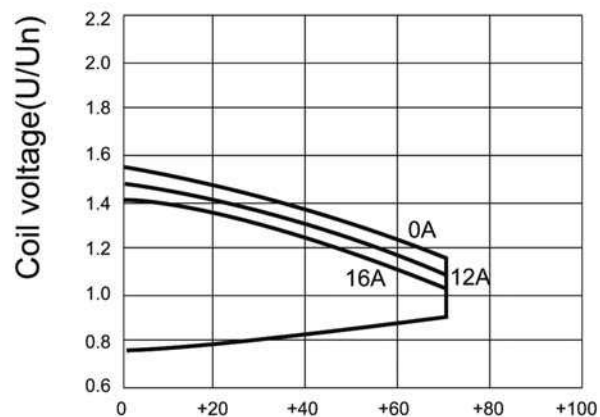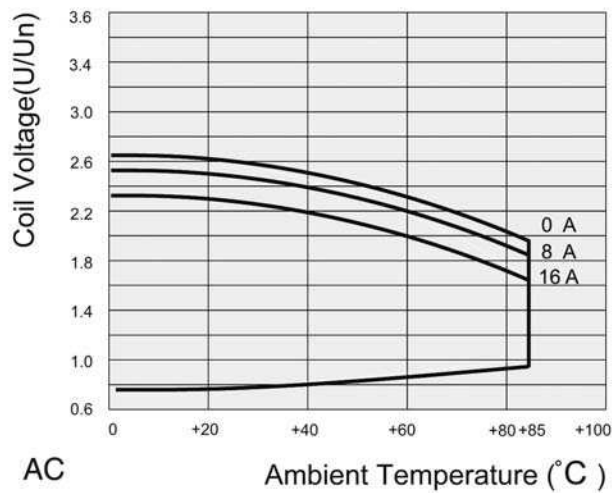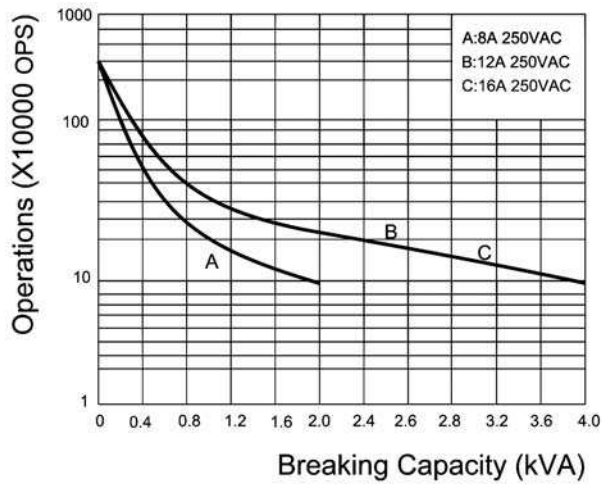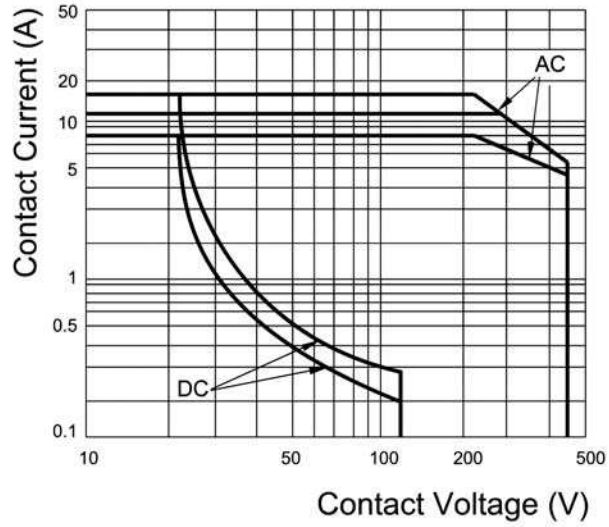

20.04.2013 – Subject to technical modi

Part-No. 770121

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0222
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31
www.lutze.com • sales.gb@lutze.co.uk