



<b>Identification</b>	Type	RE4W-0410 AC12V
	Part-No.	770410
<b>Description</b>	Industrial relay, 4 changeover contacts AC/DC 250 V, 5 A, 1250 VA Contact material: AgNi, AgNi+5 µm gold-plating	
<b>General</b>	Connection device: plug-in Protection class: RTI – dust proof Operation temperature range: -40 °C ... +70 °C Weight: 0.0370 kg/piece Dimensions (w x h x d): 28.0 x 21.2 x 35.0 mm PU: 10 Approvals: cULus, TÜV, CQC	

25.08.2017 – Subject to technical modification

Part-No. 770410

USA: LUTZE INC.


13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



## Dimensions

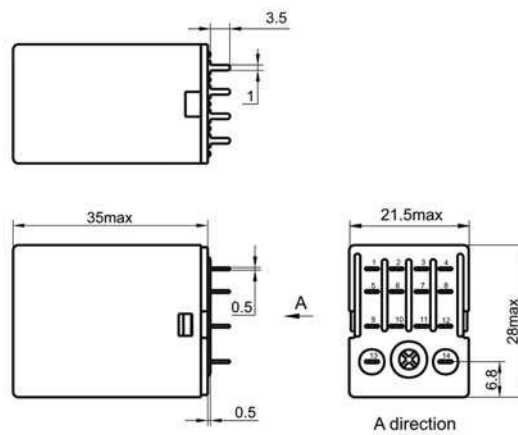

## Comments

To prevent damage to the gold layer, the stated values should not be exceeded. At higher switching capacity, the gold layer vaporizes. The undercurrent in the housing can result in flashovers between coil - contact.

25.08.2017 – Subject to technical modification

Part-No. 770410

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223

www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2

www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY