



Identification	Type	RE4W-0417 AC230V
	Part-No.	770417

Description	Industrial relay, 4 changeover contacts AC/DC 250 V, 5 A, 1250 VA Contact material: AgNi, AgNi+5 µm gold-plating
--------------------	--

General	
Connection device	plug-in
Protection class	RTI – dust proof
Operation temperature range	-40 °C ... +70 °C
Weight	0.0370 kg/piece
Dimensions (w x h x d)	28.0 x 21.2 x 35.0 mm
PU	10
Approvals	cULus TÜV CQC

25.08.2017 – Subject to technical modification

Part-No. 770417

USA: LUTZE INC.


13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



Dimensions

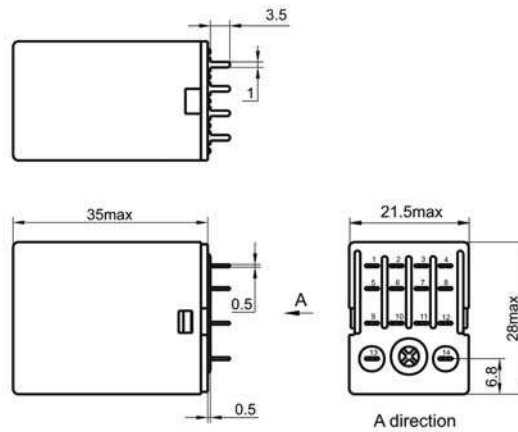

Comments

To prevent damage to the gold layer, the stated values should not be exceeded. At higher switching capacity, the gold layer vaporizes. The undercurrent in the housing can result in flashovers between coil - contact.

25.08.2017 – Subject to technical modification

Part-No. 770417

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223

www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2

www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY