

Identification	Type	RE2WHV-0923 DC110V
	Part-No.	770923
Description	Mini relay, 2 changeover contact AC 400 V/DC 300 V, 8 A, 2000 VA Contact material: AgNi, AgNi+5 µm gold-plating	
General	Connection device plug-in	
	Protection class RTII – flux-tight	
	Operation temperature range -40 °C ... +70 °C	
	Storage temperature range -40 °C ... +85 °C	
	Weight 0.0140 kg/piece	
	Dimensions (w x h x d) 29.0 x 15.7 x 12.7 mm	
	PU 10	
	Approvals UL	
	VDE	

25.08.2017 – Subject to technical modification

Part-No. 770923

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Dimensions

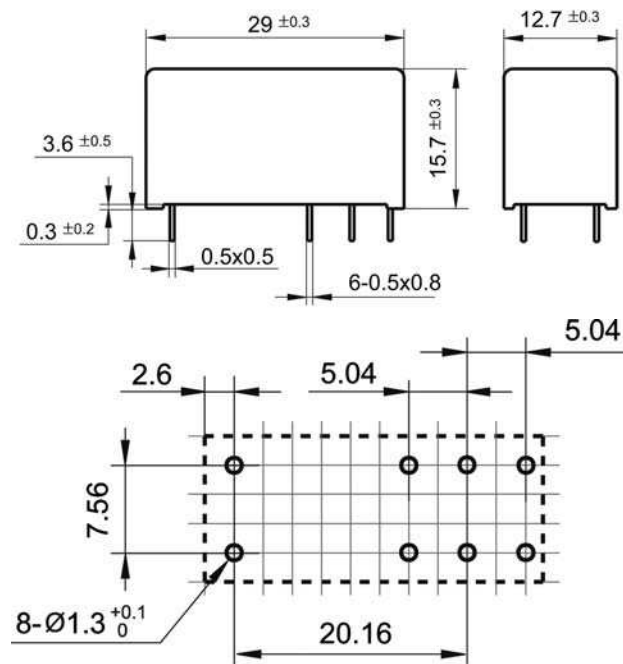

Comments

To prevent damage to the gold layer, the stated values should not be exceeded.
At higher switching capacity, the gold layer vaporizes. The undercurrent in the housing can result in flashovers between coil - contact.

25.08.2017 – Subject to technical modification

Part-No. 770923

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223

www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2

www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY