

Identification	Type	RE2WHV-0925 AC230
	Part-No.	770925

Input

Nominal voltage	AC 230 V
Power consumption	AC: 0.75 VA
Interrupting voltage	AC: $\geq 0.15 U_n$

Output

Min. switching voltage	AC/DC 5 V
Max. switching voltage	AC 400 V / DC 300 V
Min. switching current	AgNi+ 5 μ m HV: AC/DC 2 mA
Max. switching current	AC1: 8 A / 250 V AC, DC1: 8 A / 24 V DC
Switching capacity AC 15	3.3 A
Switching capacity DC 13	24 V: 2 A, 115 V: 300 mA, 230 V: 150 mA
Max. switching capacity	2000 VA
Switching frequency	AC1: 600 cycles/hour, without load 72,000 cycles/hour
Mechanical service life	$> 3 \times 10^7$ operations
Switch-on delay	15 ms
Switch-off delay	8 ms
Clearance/creep. dist. (control/load side)	> 10 mm
Overvoltage category	III
Pollution degree	3

20.04.2013 – Subject to technical modification

Part-No. 770925

USA: LUTZE INC.
 13330 South Ridge Drive • Charlotte, NC 28273, USA
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
 www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.
 Unit 3, Sandy Hill Park
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
 www.lutze.com • sales.gb@lutze.co.uk



General

Contact type	2 change over contact
Rated insulation voltage (EN 50178)	AC 400 V (C 250/ B 400)
Resistor	< 100 mΩ
Contact material	AgNi+5 μm HV
Protection class	IP 40
Protection class	RTII - flux-tight
Shock resistance	10 g
Vibration resistance	10 g, 10...150 Hz
Safe isolation	yes
Operation temperature range	-40 °C – 70 °C
Storage temperature range	-40 °C – 85 °C
Dimensions (w × h × d)	29.0×15.7×12.7 mm
Weight (kg/piece)	0.014
Approvals	UL, CSA, VDE
Termination	plug-in

Dimensions

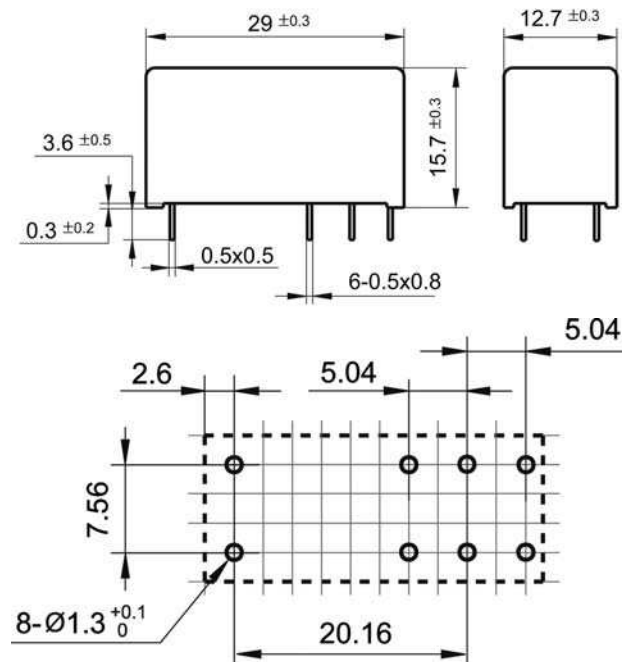

20.04.2013 – Subject to technical modification

Part-No. 770925

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
 www.lutze.com • info@lutze.com





United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
 www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Limit curve

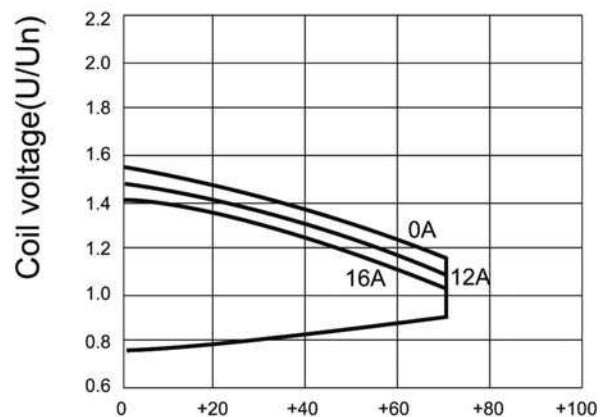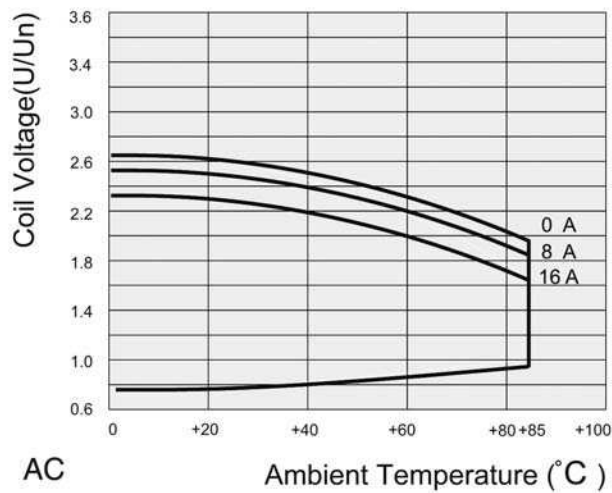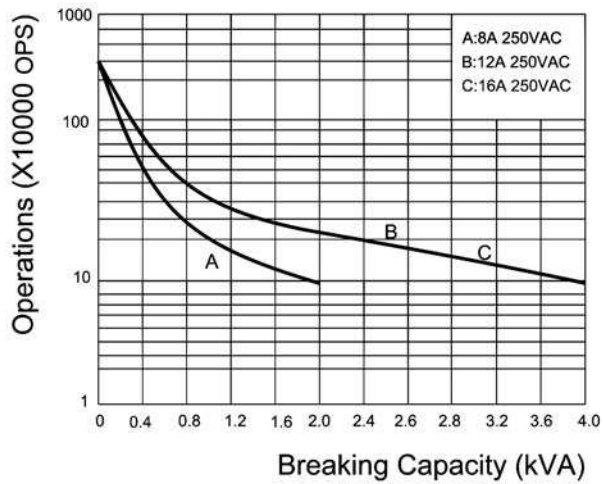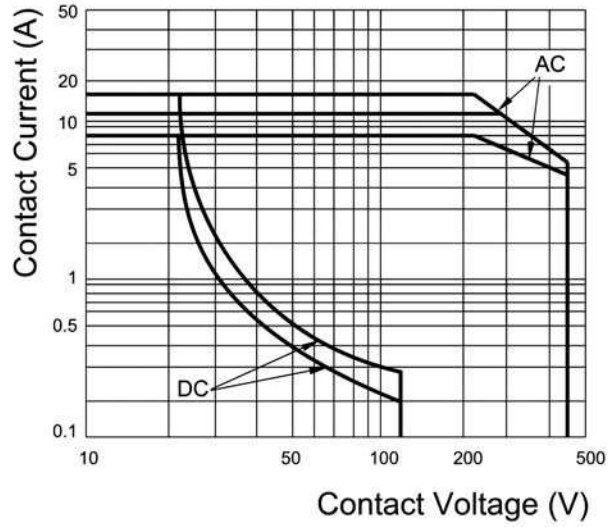

20.04.2013 – Subject to technical modi

Part-No. 770925

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0222
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31
www.lutze.com • sales.gb@lutze.co.uk

Comments

To prevent damage to the gold layer, the stated values should not be exceeded.
At higher switching capacity, the gold layer vaporizes. The undercurrent in the housing
can result in flashovers between coil - contact.

20.04.2013 – Subject to technical modification

Part-No. 770925

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY