


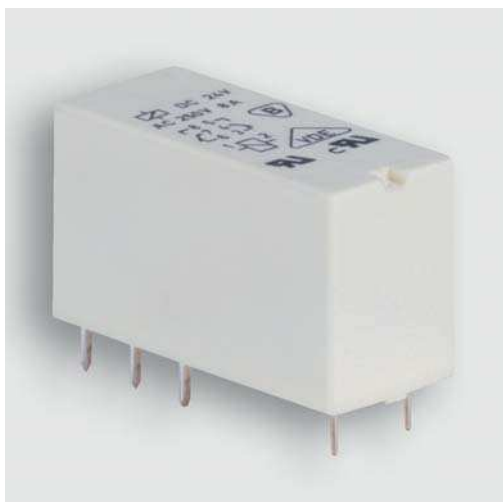

Identification	Type	RE2W-0926 AC12
	Part-No.	770926
Description		
Mini relay, 2 changeover contact AC 400 V/DC 300 V, 8 A, 2000 VA Contact material: AgNi, AgNi+5 µm gold-plating		
General		
Connection device	plug-in	
Protection class	RTII – flux-tight	
Operation temperature range	-40 °C ... +70 °C	
Storage temperature range	-40 °C ... +85 °C	
Weight	0.0140 kg/piece	
Dimensions (w × h × d)	29.0 × 15.7 × 12.7 mm	
PU	10	
Approvals	UL VDE	

25.08.2017 – Subject to technical modification

Part-No. 770926

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU


Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Dimensions

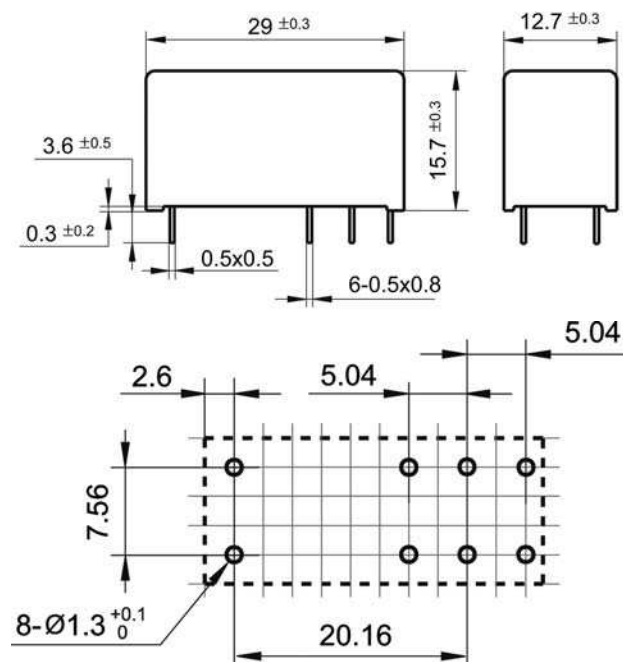

Comments

To prevent damage to the gold layer, the stated values should not be exceeded.
At higher switching capacity, the gold layer vaporizes. The undercurrent in the housing can result in flashovers between coil - contact.

25.08.2017 – Subject to technical modification

Part-No. 770926

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY