

<b>Identification</b>	Type	LCOS-FT-PE-225-00-03-1
	Part-No.	780331.225.1
<b>Description</b>	LCOS function carrier 22.5 mm Modular design Integrated PE contact	
<b>Use/Application/Properties</b>	Function carrier 22.5 mm, can be expanded with modules, with PE direct contact	
<b>Slots</b>	1 x 22.5mm	
<b>General</b>	Housing material PA 6.6 (UL 94 V-0, NFF I2, F2)	
	Colour of the housing pebble grey	
	Mounting DIN rail mountable TS35 (EN 60715)	
	Installation position vertical	
	Marking 2 x Labelling plates 5x5 mm	
	Dimensions (w x h x d) 22.5 x 28.0 x 110.0 mm	
	Weight 0.040 kg/piece	

25.08.2017 – Subject to technical modification

Part-No. 780331.225.1

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223  
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2  
www.lutze.com · sales.gb@lutze.co.uk


## Technical data sheet · Load monitoring

Standards	EN 60947-1 EN 50178 EN 50124-1 EN 50175 IEC 60068-2-42, 43, 8, 27 EN 60064-1
Approvals	UL GL
PU	1 piece

### General ambient conditions

Operation temperature range	-40 °C ... +85 °C
Storage temperature range	-40 °C ... +85 °C
Relative air humidity	5 % – 95 % without condensation
Protection class	IP20
Heat dissipation	9 W @ 20°C, 4 W @ 60°C, 3 W @ 75°C
Shock resistance	15 g 11 ms acc. to IEC 60068-2-27
Vibration resistance	4 g acc. to EN 60068-2-8

### Dimensions

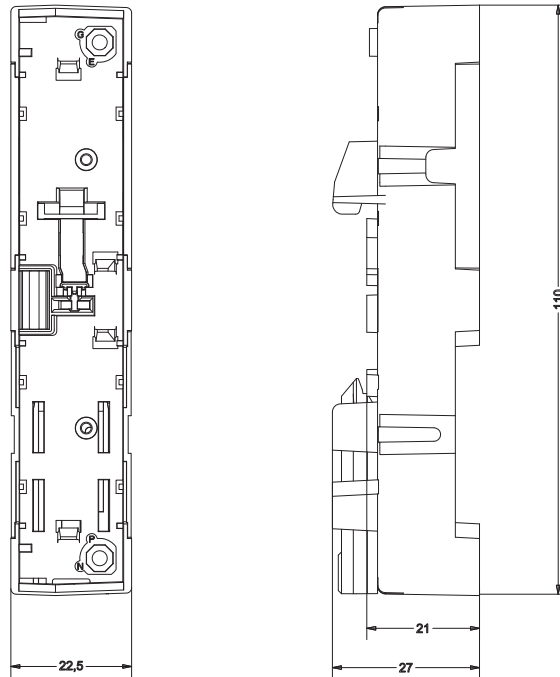

25.08.2017 – Subject to technical modification

Part-No. 780331.225.1

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223  
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2  
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY